

ISUZU

SERIES N-F VERSION Euro VI OBD-D



EDITION 2020

Série Bleu

N.B.: Technical and specification data are given as guide only and they can be modified at any time with no prior warning. Nor the constructor neither MIDI Europe can be considered responsible if any of this information is incorrect.



INDEX

SERIES N

3,5 ton	▪ L 35	4-5
	▪ L 35 ADAPTOR S	6-7
	▪ L 35 CREW	8-9
	▪ N 35	10-11
5,5 ton	▪ M 55	12-13
6,5 ton	▪ P 65	14-15
7,5 ton	▪ P 75 (150 hp)	16-17
	▪ P 75 (190 hp)	18-19
	▪ P 75 CREW (190 hp)	20-21
9,5 ton	▪ Q 95	22-23


SERIES F

11 ton	▪ F 11 Suspensions mechanic	24-25
	▪ F 11 Suspensions air	26-27
14 ton	▪ F 14 Suspensions mechanic	28-29
	▪ F 14 Suspensions air	30-31

EDITION 2020 | Série Bleu

N.B.: Technical and specification data are given as guide only and they can be modified at any time with no prior warning. Nor t responsible if any of this information is incorrect.

ope can be concei

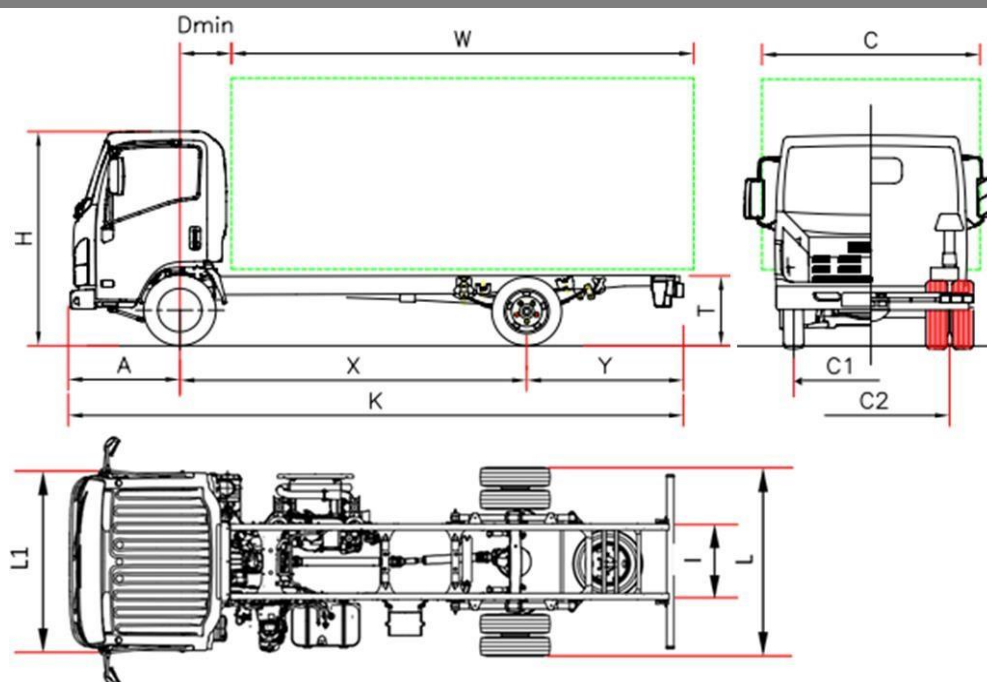

€ 30.222 VAT excluded

L 35		L35 F	L 35 H	L 35 K	L 35 L
Wheelbase	X	2750	3350	3845 ⁽⁵⁾	4175 ⁽⁵⁾
Overall length	K	5295	6015	7032	7565
Body lenght min. ⁽¹⁾	W	3535	4255	5272	5805
Body lenght Max. ⁽¹⁾	W	3820	4490	5502	6030
Rear overhang	Y	1435	1555	2077	2280
Chassis height	T	730	720		
Overall height	H	2150	2160		
Rear axle width	L	1865			
Cab width ⁽²⁾	L1	1815			
Body width ⁽³⁾	C	2120			
Front axle to back of cab	D min	650			
Front overhang	A	1110			
Frame internal size	I	700			
Front track	C1	1475			
Rear track	C2	1425			
Minimum Road Clearance	-	190			
Turning diameter (m) ⁽⁴⁾	-	11,3	13,5	15,2	16,4
WEIGHT (kg)					
Unladen weight ⁽⁶⁾		2240	2300	2350	2400
Unladen weight front axle		1580/660	1600/700	1625/725	1650/750
Minimum weight vehicle equipped		2585			
Gross Vehicle Weight (GVW)		3500			
Front/rear total weight		2100 / 2435			
Max trailer weight unbraked/Max trailer weight braked		750 / 3500			

1. The length of the body refers to a uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications).

2. Excluding turn signal and side mirrors

3. Possible widths with optional mirror brackets 1865/1945 – 1945/2120 – 2120/2275

4. Curb to curb turning diameter

5. Wheelbase modified (see thw optional equipment)

6. The Unladen weight include spare wheel, full fuel tank and driver, optional excluded. NEES + 35 Kg (25/10)


L 35 - Wheelbase (mm) F 2750 - H 3350 - K 3845 - L 4175

MARCH 2021

€ 30.222 (**)

Equipment	NEES 2 (only Wheelbase F)	€ 1290 (**)
	Right-hand drive (*)	€ 1182 (**)
(*) only Wheelbase F e NEES 2; (*) according to availability		(**) VAT excluded
Standard features		
<ul style="list-style-type: none"> • EGR - DPD - SCR • MID display • Engine exhaust brake • Reverse warning buzzer • Immobilizer 	<ul style="list-style-type: none"> • Central locking with remote control • Suspended seat • Power operated windows • Day-time running lights 	<ul style="list-style-type: none"> • Fog lamps Fr and Rr • Radio DAB+ with USB • Head lamps control levelling • Steering adjustable (tilting and height)
Optional	• Air conditioning	€ 1089 (**)
	• Wheelbase modified	Ask to your dealer
	• Body builder Controller	€ 354 (**)
Engine	ISUZU 4JJ1E6N Diesel Engine 4 cylinders. Intercooler, common-rail with direct injection Variable-geometry turbocharger DISPLACEMENT 2999 cm ³ POWER 110kW (150 hp) 2800 rpm TORQUE 375 Nm 1600 – 2800 rpm EMISSIONS REGULATIONS EURO VI OBD-D.	
Safety systems	ABS with BAS (Brake Assist System) ESC (Electronic Stability Control) with ASR SRS Driver Airbag	
Tank	68 L Wheelbase F – 93 L Wheelbase H-K-L	16 L Ad-Blue®
Gearbox and Final drive ratio	5 gear MYY5A – 5.315 - 2.908 - 1.558 - 1.000 - 0.721; Reverse 5.068; Final gear ratio 3.909 (43/11)	
Transmission control	Manual	NEES 2
Dimensions of the chassis	Width 65 mm, Height 180 mm, Thickness 4 mm	
Number of seats	3	
Axle	2 the rear one with twin wheels.	
Tires	Front 205/75 R16C simple. Rear 205/75 R16C dual.	
Brakes	Front and rear: ventilated discs with asbestos-free linings. Hydraulic system, with vacuum brake booster EEC standards with ABS, independent circuits on both axles. Drum parking brake on the transmission shaft.	
Suspensions	Front and rear: Multi semi elliptical alloy steel leaf spring. Hydraulic double acting shock absorbers.	
Electric system	Nominal voltage 24V - Generator 90A - 2 x Battery 70Ah	

N.B.: Technical and specification data are given as guide only and they can be modified at any time with no prior warning. Nor the constructor neither MIDI Europe can be considered responsible if any of this information is incorrect.

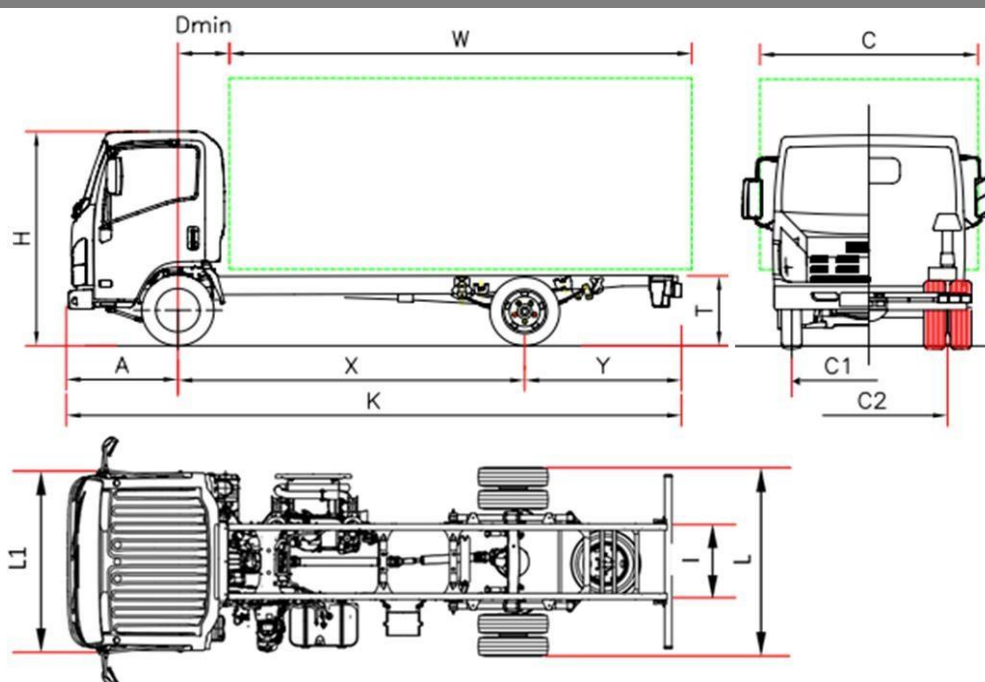

€ 31.032 VAT excluded

L 35 ADAPTOR S		L35 F	L 35 H
Wheelbase	X	2760	3360
Overall length	K	5295	6015
Body lenght min. ⁽¹⁾	W	3545	4265
Body lenght Max. ⁽¹⁾	W	3830	4500
Rear overhang	Y	1435	1555
Chassis height	T	715	
Overall height	H	2150	2160
Rear axle width	L	1860	
Cab width ⁽²⁾	L1	1815	
Body width ⁽³⁾	C	2120	
Front axle to back of cab	D min	650	
Front overhang	A	1100	
Frame internal size	I	700	
Front track	C1	1400	
Rear track	C2	1425	
Minimum Road Clearance	-	180	
Turning diameter (m) ⁽⁴⁾	-	10,0	11,9
WEIGHT (kg)			
Unladen weight ⁽⁵⁾		2200	2250
Unladen weight front axle		1530/670	1550/700
Minimum weight vehicle equipped		2585	
Gross Vehicle Weight (GVW)		3500	
Front/rear total weight		2100 / 2435	
Max trailer weight unbraked/Max trailer weight braked		750 / 3500	

1. The length of the body refers to a uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications).
2. Excluding turn signal and side mirrors
3. Possible widths with optional mirror brackets 1860/1945 – 1945/2120 – 2120/2275
4. Curb to curb turning diameter
5. The Unladen weight include spare wheel, full fuel tank and driver, optional excluded. NEES + 35 Kg (25/10)


L 35 ADAPTOR S - Wheelbase (mm) F 2760 - H 3360

MARCH 2021

€ 31.032 (**)

Equipment	NEES 2 (only Wheelbase H)	€ 1290 (**)
(**)VAT excluded		
Standard features		
<ul style="list-style-type: none"> • EGR - DPD - SCR • MID display • Engine exhaust brake • Suspended seat • Immobilizer 	<ul style="list-style-type: none"> • Reverse warning buzzer • Central locking with remote control • Power operated windows • Day-time running lights 	<ul style="list-style-type: none"> • Radio DAB+ with USB • Fog lamps Fr and Rr • Head lamps control levelling • Steering adjustable (tilting and height)
Optional	<ul style="list-style-type: none"> • Air conditioning • Body builder Controller 	€ 1089 (**) € 354 (**)
Engine	ISUZU 4JJ1E6N Diesel Engine 4 cylinders Intercooler, common-rail with direct injection Variable-geometry turbocharger DISPLACEMENT 2999 cm ³ POWER 110kW (150 hp) 2800 rpm. TORQUE. 375 Nm 1600 – 2800 rpm EMISSIONS REGULATIONS EURO VI OBD-D.	
Safety systems	ABS with BAS (Brake Assist System) ESC (Electronic Stability Control) with ASR SRS Driver Airbag	
Tank	68 L Wheelbase F – 93 L Wheelbase H	16 L Ad-Blue®
Gearbox and Final drive ratio	5 gear MYY5A – 5.315 - 2.908 - 1.558 - 1.000 - 0.721; Reverse 5.068; Final gear ratio 3.909 (43/11)	
Transmission control	Manual	NEES 2
Dimensions of the chassis	Width 50 mm, Height 180 mm, Thickness 4 mm	
Number of seats	3	
Axle	2 the rear one with twin wheels.	
Tires	Front 205/75 R16C simple. Rear 205/75 R16C dual.	
Brakes	Front and rear: ventilated discs with asbestos-free linings. Hydraulic system, with vacuum brake booster EEC standards with ABS, independent circuits on both axles. Drum parking brake on the transmission shaft.	
Suspensions	Front: Independent suspension with coil spring and double wishbone. Rear: Multi semi elliptical alloy steel leaf spring. Hydraulic double acting shock absorbers.	
Electric system	Nominal voltage 24V - Generator 90A - 2 x Battery 70Ah	

N.B.: Technical and specification data are given as guide only and they can be modified at any time with no prior warning. Nor the constructor neither MIDI Europe can be considered responsible if any of this information is incorrect.

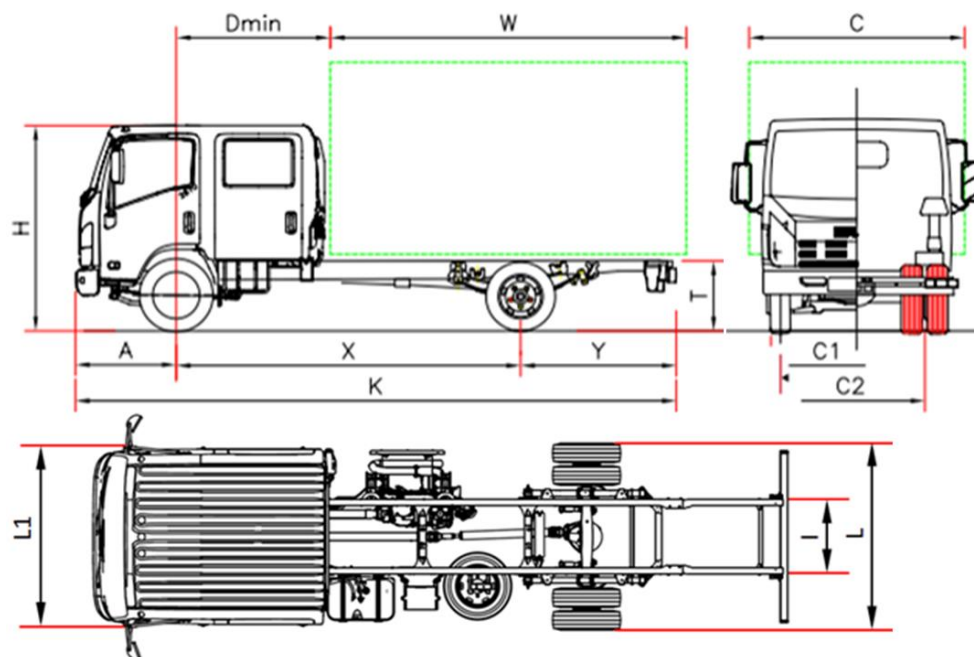

€ 34.242 VAT excluded

L 35 CREW		L35 H
Wheelbase	X	3350
Overall length	K	6015
Body lenght min. ⁽¹⁾	W	3205
Body lenght Max. ⁽¹⁾	W	3570
Rear overhang	Y	1555
Chassis height	T	735
Overall height	H	2270
Rear axle width	L	1865
Cab width ⁽²⁾	L1	1815
Body width ⁽³⁾	C	2120
Front axle to back of cab	D min	1700
Front overhang	A	1110
Frame internal size	I	700
Front track	C1	1475
Rear track	C2	1425
Minimum Road Clearance	-	165
Turning diameter (m) ⁽⁴⁾	-	13,5
WEIGHT (kg)		
Unladen weight ⁽⁵⁾		2465
Unladen weight front axle		1705/760
Minimum weight vehicle equipped		2585
Gross Vehicle Weight (GVW)		3500
Front/rear total weight		2100 / 2435
Max trailer weight unbraked/Max trailer weight braked		750 / 3500

1. The length of the body refers to a uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications).
2. Excluding turn signal and side mirrors
3. Possible widths with optional mirror brackets 1865/1945 – 1945/2120 – 2120/2275
4. Curb to curb turning diameter
5. The Unladen weight include spare wheel, full fuel tank and driver, optional excluded. NEES +35 Kg


L 35 CREW - Wheelbase (mm) H 3350

MARCH 2021

€ 34.242 (**)

Equipment		
(**)VAT excluded		
Standard features		
<ul style="list-style-type: none"> • EGR - DPD - SCR • MID display • Engine exhaust brake • Immobilizer 	<ul style="list-style-type: none"> • Reverse warning buzzer • Central locking with remote control • Power operated windows • Day-time running lights 	<ul style="list-style-type: none"> • Radio DAB+ with USB • Fog lamps Fr and Rr • Head lamps control levelling • Steering adjustable (tilting and height)
Optional	• Air conditioning	€ 1089 (**)
	• Body builder Controller	€ 354 (**)

Engine	ISUZU 4JJ1E6N Diesel Engine 4 cylinders. Intercooler, common-rail with direct injection Variable-geometry turbocharger DISPLACEMENT 2999 cm ³ POWER. 110kW (150 hp) 2800 rpm TORQUE max. 375 Nm 1600 – 2800 rpm EMISSIONS REGULATIONS: EURO VI OBD-D.	
Safety systems	ABS with BAS (Brake Assist System) ESC (Electronic Stability Control) with ASR SRS Driver Airbag	
Tank	68 L	16 L Ad-Blue®
Gearbox and Final drive ratio	5 gear MYY5A – 5.315 - 2.908 - 1.558 - 1.000 - 0.721; Reverse 5.068; Final gear ratio 3.909 (43/11)	
Transmission control	Manual	NEES 2
Dimensions of the chassis	Width 65 mm, Height 180 mm, Thickness 4 mm	
Number of seats	6	
Axle	2 the rear one with twin wheels.	
Tires	Front 205/75 R16C simple. Rear 205/75 R16C dual.	
Brakes	Front and rear: ventilated discs with asbestos-free linings. Hydraulic system, with vacuum brake booster EEC standards with ABS, independent circuits on both axles. Drum parking brake on the transmission shaft.	
Suspensions	Front and rear: Multi semi elliptical alloy steel leaf spring. Hydraulic double acting shock absorbers.	
Electric system	Nominal voltage 24V - Generator 90A - 2 x Battery 70Ah	

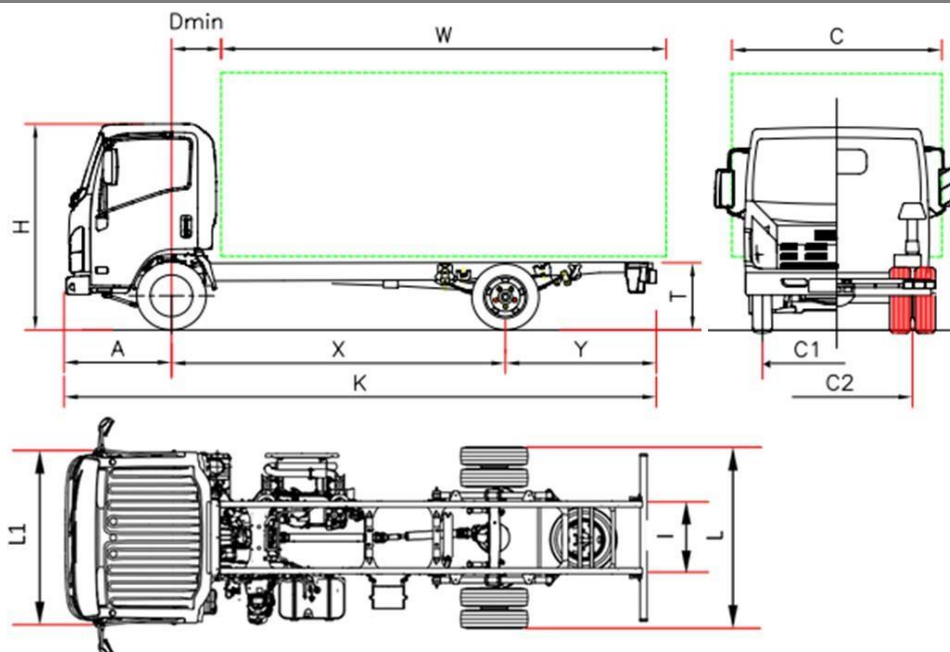

€ 31.692 VAT excluded

N 35		N35 F	N 35 H	N 35 K	N 35 L
Wheelbase	X	2800	3395	3845 ⁽⁵⁾	4175 ⁽⁵⁾
Overall length	K	5235	6085	7032	7565
Body length min. ⁽¹⁾	W	3415	4265	5212	5745
Body length Max. ⁽¹⁾	W	3710	4555	5442	5970
Rear overhang	Y	1325	1580	2077	2280
Chassis height	T	730	720	720	720
Overall height	H	2225			
Rear axle width	L	1925			
Cab width ⁽²⁾	L1	2040			
Body width ⁽³⁾	C	2345			
Front axle to back of cab	D min	710 ⁽⁷⁾			
Front overhang	A	1110			
Frame internal size	I	750			
Front track	C1	1680			
Rear track	C2	1485			
Minimum Road Clearance	-	190			
Turning diameter (m) ⁽⁴⁾	-	10,0	11,8	13,2	14,2
WEIGHT (kg)					
Unladen weight ⁽⁶⁾		2385	2430	2480	2530
Unladen weight front axle		1670/715	1680/750	1705/775	1730/800
Minimum weight vehicle equipped		2585			
Gross Vehicle Weight (GVW)		3500			
Front/rear total weight		2100 / 2435			
Max trailer weight unbraked/Max trailer weight braked		750/ 3500			

1. The length of the body refers to a uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications).
2. Excluding turn signal and side mirrors
3. Possible widths with optional mirror brackets: 2040/2170 – 2170/2345 – 2345/2500
4. Curb to curb turning diameter
5. Wheelbase modified (see thw optional equipment)
6. The Unladen weight include spare wheel, full fuel tank and driver, optional excluded.
7. NEES II 650.

N 35 - Wheelbase (mm) F 2800 - H 3395 - K 3845 - L 4175

MARCH 2021

€ 31.692 (**)

Equipment	NEES 2	€ 1290 (**)
(**)VAT excluded		
Standard features		
<ul style="list-style-type: none"> • EGR - DPD - SCR • MID display • Side mirrors heated and electric • Engine exhaust brake 	<ul style="list-style-type: none"> • Immobilizer • Central locking with remote control • Suspended seat • Power operated windows • Steering adjustable (tilting and height) 	<ul style="list-style-type: none"> • Radio DAB+ with USB • Fog lamps Fr and Rr • Head lamps control levelling • Day-time running lights
Optional	• Air conditioning	€ 1089 (**)
	• Wheelbase modified	Ask to your dealer
	• Body builder Controller	€ 354 (**)

Engine	ISUZU 4JJ1E6N Diesel Engine 4 cylinders. Intercooler, common-rail with direct injection Variable-geometry turbocharger DISPLACEMENT 2999 cm ³ POWER 110kW (150 hp) 2800 rpm TORQUE 375 Nm 1600 – 2800 rpm EMISSIONS REGULATIONS EURO VI OBD-D.
--------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Safety systems	ABS with BAS (Brake Assist System) ESC (Electronic Stability Control) with ASR SRS Driver Airbag
----------------	---------------------------------------------------------------------------------------------------------------

Tank	90 L	16 L Ad-Blue®
------	------	---------------

Gearbox and Final drive ratio	5 gear MYY5A – 5.315 - 2.908 - 1.558 - 1.000 - 0.721; Reverse 5.068; Final gear ratio 3.909 (43/11)
-------------------------------	-----------------------------------------------------------------------------------------------------------

Transmission control	Manual	NEES 2
----------------------	--------	--------

Dimensions of the chassis	Width 70 mm, Height 214 mm, Thickness 5 mm
---------------------------	--------------------------------------------

Number of seats	3
-----------------	---


Axle	2 the rear one with twin wheels.
------	-------------------------------------

Tires	Front 205/75 R16C simple. Rear 205/75 R16C dual.
-------	-----------------------------------------------------

Brakes	Front and rear: ventilated discs with asbestos-free linings. Hydraulic system, with vacuum brake booster EEC standards with ABS, independent circuits on both axles. Drum parking brake on the transmission shaft.
--------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Suspensions	Front and rear: Multi semi elliptical alloy steel leaf spring. Hydraulic double acting shock absorbers.
-------------	---------------------------------------------------------------------------------------------------------

Electric system	Nominal voltage 24V - Generator 90A - 2 x Battery 70Ah
-----------------	--------------------------------------------------------

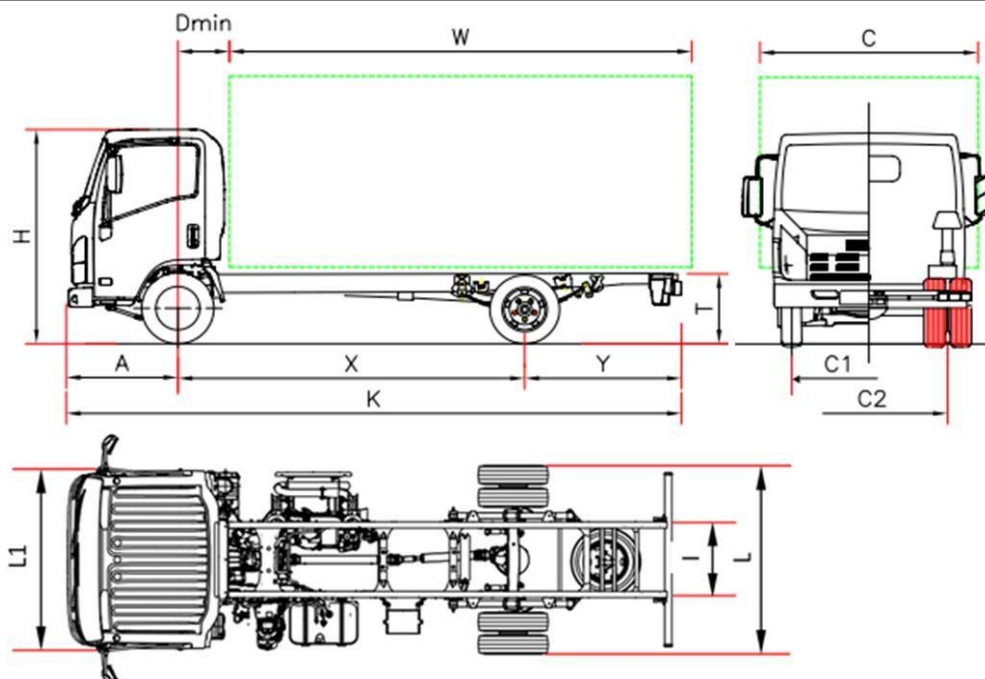

€ 37.770 VAT excluded

M 55		M55 E	M55 F	M55 H
Wheelbase	X	2500 ⁽⁵⁾	2750	3350
Overall length	K	5045	5295	6020
Body length min. ⁽¹⁾	W	3285	3535	4260
Body length Max. ⁽¹⁾	W	3475	3820	4490
Rear overhang	Y	1435	1435	1560
Chassis height	T	740	740	735
Overall height	H	2150	2150	2160
Rear axle width	L	1865		
Cab width ⁽²⁾	L1	1815		
Body width ⁽³⁾	C	2120		
Front axle to back of cab	D min	650		
Front overhang	A	1110		
Frame internal size	I	700		
Front track	C1	1475		
Rear track	C2	1425		
Minimum Road Clearance	-	190		
Turning diameter (m) ⁽⁴⁾	-	10,4	11,3	13,5
WEIGHT (kg)				
Unladen weight ⁽⁶⁾		2310	2310	2370
Unladen weight front axle		1615/695	1615/695	1640/730
Gross Vehicle Weight (GVW)		5500		
Front/rear total weight		2100 / 3980		
Max trailer weight unbraked/Max trailer weight braked		750 / 3500		

1. The length of the body refers to a uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications).
2. Excluding turn signal and side mirrors
3. Possible widths with optional mirror brackets 1865/1945 – 1945/2120 – 2120/2275
4. Curb to curb turning diameter
5. Wheelbase modified (see the optional equipment)
6. The Unladen weight include spare wheel, full fuel tank and driver, optional excluded. NEES + 35 Kg (25/10).

M 55 - Wheelbase (mm) E 2500 - F 2750 - H 3350

MARCH 2021

€ 37.770 (**)

Equipment	NEES 2	€ 1290 (**)
	Right-hand drive (Wheelbase E/F NEES 2) (*)	€ 1182 (**)

(*)according to availability

(**) VAT excluded

Standard features		
<ul style="list-style-type: none"> • EGR - DPD – SCR • MID display • Engine exhaust brake • Side mirrors heated and electric • Immobilizer 	<ul style="list-style-type: none"> • Power operated windows • Suspended seat • Fog lamps Fr and Rr • Reverse warning buzzer • Radio DAB+ with USB • Central locking with remote control 	<ul style="list-style-type: none"> • Head lamps control levelling • Day-time running lights • Steering adjustable (tilting and height) • Speed limiter (90km/h)
Optional	• Air conditioning	€ 1089 (**)
	• Wheelbase modified	Ask to your dealer
	• Body builder Controller	€ 354 (**)

Engine	ISUZU 4JJ1E6N Diesel Engine 4 cylinders. Intercooler, common-rail with direct injection Variable-geometry turbocharger DISPLACEMENT 2999 cm ³ POWER 110kW (150 hp) 2800 rpm TORQUE 375 Nm 1600 – 2800 rpm EMISSIONS REGULATIONS EURO VI OBD-D.
--------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Safety systems	ABS ESC (Electronic Stability Control) with ASR LDWS AEBS SRS Driver Airbag
----------------	--------------------------------------------------------------------------------------------------------------

Tank	68 L Wheelbase E - F – 93 L Wheelbase H	16 L Ad-Blue®
------	----------------------------------------------------------	----------------------

Gearbox and Final drive ratio	5 gear MYY5A – 5.315 - 2.908 - 1.558 - 1.000 - 0.721; Reverse 5.068; Final gear ratio 4.300 (43/10)
-------------------------------	-----------------------------------------------------------------------------------------------------------

Transmission control	Manual	NEES 2
----------------------	---------------	--------

Dimensions of the chassis	Width 65 mm, Height 180 mm, Thickness 4 mm
---------------------------	--------------------------------------------

Number of seats	3
-----------------	---

Axle	2 the rear one with twin wheels.
------	-------------------------------------


Tires	Front 205/75 R16C simple. Rear 205/75 R16C dual.
-------	-----------------------------------------------------

Brakes	Front and rear: ventilated discs with asbestos-free linings. Hydraulic system, with vacuum brake booster EEC standards with ABS, independent circuits on both axles. Drum parking brake on the transmission shaft.
--------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Suspensions	Front and rear: Multi semi elliptical alloy steel leaf spring. Hydraulic double acting shock absorbers.
-------------	---------------------------------------------------------------------------------------------------------

Electric system	Nominal voltage 24V - Generator 90A - 2 x Battery 70Ah
-----------------	--------------------------------------------------------

N.B.: Technical and specification data are given as guide only and they can be modified at any time with no prior warning. Nor the constructor neither MIDI Europe can be considered responsible if any of this information is incorrect.

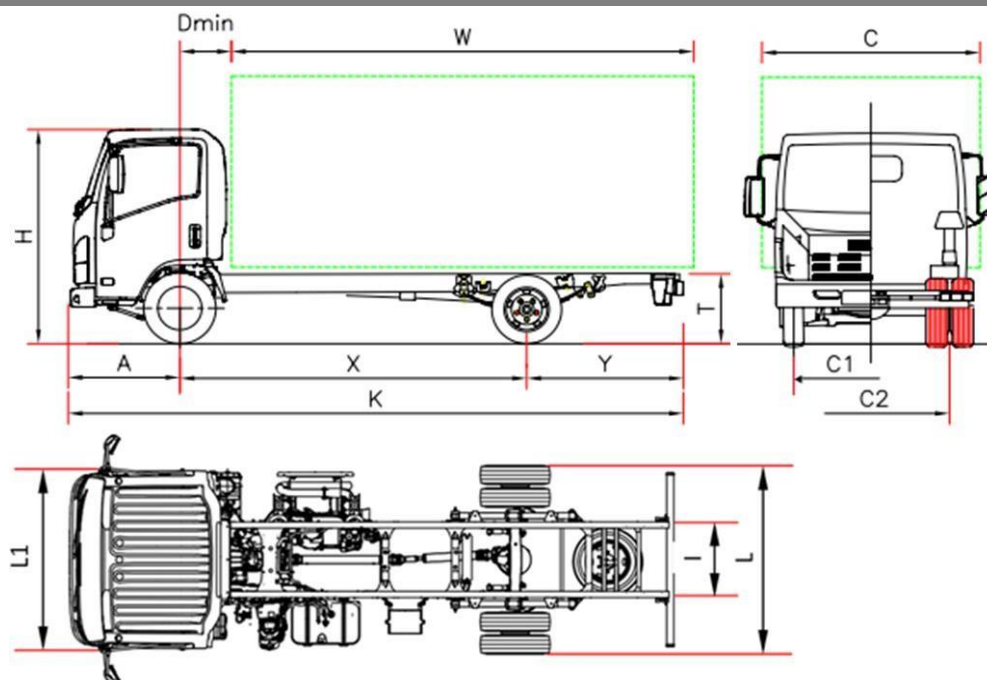

€ 41.280 VAT excluded

P 65		P65 H	P 65 K
Wheelbase	X	3395	3845
Overall length	K	6090	6735
Body lenght min. ⁽¹⁾	W	4270	4915
Body lenght Max. ⁽¹⁾	W	4555	5205
Rear overhang	Y	1585	1780
Chassis height	T	800	
Overall height	H	2250	
Rear axle width	L	1990	
Cab width ⁽²⁾	L1	2040	
Body width ⁽³⁾	C	2345	
Front axle to back of cab	D min	710 ⁽⁶⁾	
Front overhang	A	1110	
Frame internal size	I	750	
Front track	C1	1680	
Rear track	C2	1525	
Minimum Road Clearance	-	210	
Turning diameter (m) ⁽⁴⁾	-	12,7	14,2
WEIGHT (kg)			
Unladen weight ⁽⁵⁾		2600	2640
Unladen weight front axle		1730/870	1750/890
Gross Vehicle Weight (GVW)		6500	
Front/rear total weight		3100 / 4600	
Max trailer weight unbraked/Max trailer weight braked		750 / 3500	

1. The length of the body refers to a uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications).
2. Excluding turn signal and side mirrors
3. Possible widths with optional mirror brackets 2040/2170 – 2170/2345 – 2345/2500
4. Curb to curb turning diameter
5. The Unladen weight include spare wheel, full fuel tank and driver, optional excluded. NEES +35 Kg (25/10)
6. NEES II 650.

P 65 - Wheelbase (mm) H 3395 - K 3845

MARCH 2021

€ 41.280(**)


Equipment	NEES 2	€ 1290 (**)
(**)VAT excluded		
Standard features		
<ul style="list-style-type: none"> • EGR - DPD - SCR • MID display • Engine exhaust brake • Reverse warning buzzer • Immobilizer 	<ul style="list-style-type: none"> • Central locking with remote control • Power operated windows • Suspended seat • Side mirrors heated and electric • Radio DAB+ with USB 	<ul style="list-style-type: none"> • Head lamps control levelling • Day-time running lights • Steering adjustable (tilting and height) • Speed limiter (90km/h)
Optional	• Air conditioning	€ 1089 (**)
	• Wheelbase modified	Ask to your dealer
	• Body builder Controller	€ 354 (**)

Engine	ISUZU 4JJ1E6N Diesel Engine 4 cylinders. Intercooler, common-rail with direct injection Variable-geometry turbocharger DISPLACEMENT 2999 cm ³ POWER 110kW (150 hp) 2800 rpm TORQUE 375 Nm 1600 – 2800 rpm EMISSIONS REGULATIONS EURO VI OBD-D.
--------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Safety systems	ABS ESC (Electronic Stability Control) with ASR LDWS AEBS SRS 2 Airbag (Driver/Pass.)
Tank	90 L <div>16 L Ad-Blue®</div>
Gearbox and Final drive ratio	6 gear MYY6S – 5.979 - 3.434 - 1.832 - 1.297 - 1.000 - 0.759; Reverse 5.068; Final gear ratio 4.556 (41/9)
Transmission control	Manual <div>NEES 2</div>
Dimensions of the chassis	Width 70 mm, Height 214 mm, Thickness 5 mm
Number of seats	3
Axle	2 the rear one with twin wheels.
Tires	Front 215/75 R17,5C simple. Rear 215/75 R17,5C dual.
Brakes	Front and rear: ventilated discs with asbestos-free linings. Hydraulic system, with vacuum brake booster EEC standards with ABS, independent circuits on both axles. Drum parking brake on the transmission shaft.
Suspensions	Front and rear: Multi semi elliptical alloy steel leaf spring. Hydraulic double acting shock absorbers.
Electric system	Nominal voltage 24V - Generator 90A - 2 x Battery 70Ah

N.B.: Technical and specification data are given as guide only and they can be modified at any time with no prior warning. Nor the constructor neither MIDI Europe can be considered responsible if any of this information is incorrect.

150 hp Série Bleu OBD-D (7,5 ton)

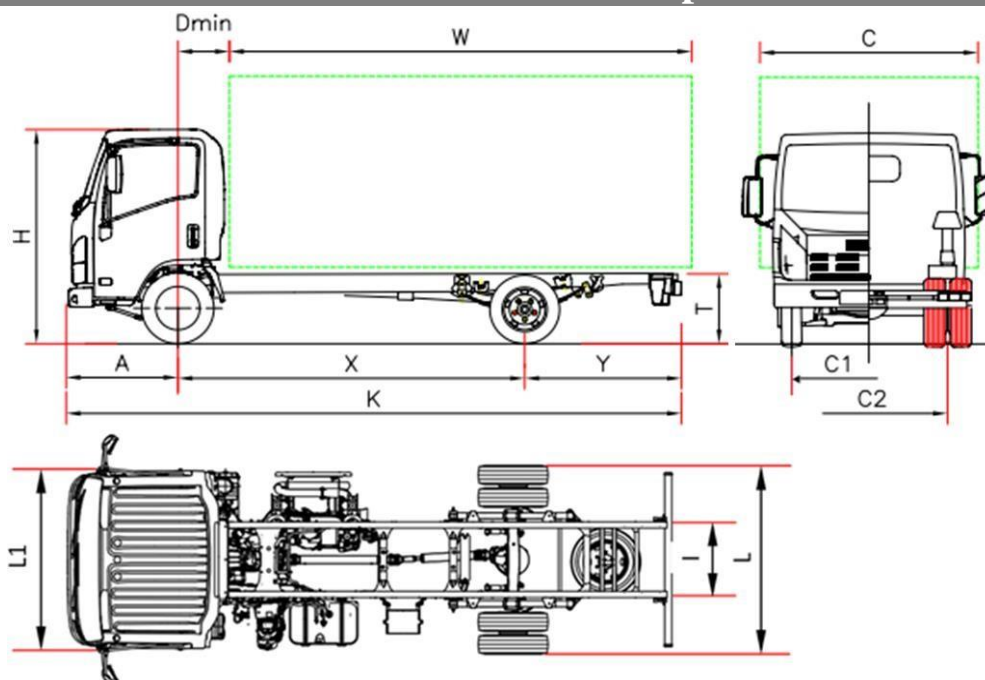

€ 42.324 VAT excluded

P 75		P 75 F	P 75 H	P 75 K	P 75 M
Wheelbase	X	2900 ⁽⁶⁾	3365	3815	4475
Overall length	K	5570	6040	6690	7870
Body lenght min. ⁽¹⁾	W	3750	4220	4870	6050
Body lenght Max. ⁽¹⁾	W	3930	4555	5185	6365
Rear overhang	Y	1560	1565	1765	2285
Chassis height	T	800			
Overall height	H	2265			
Rear axle width	L	2115			
Cab width ⁽²⁾	L1	2040			
Body width ⁽³⁾	C	2345			
Front axle to back of cab	D min	710 ⁽⁷⁾			
Front overhang	A	1110			
Frame internal size	I	850			
Front track	C1	1680			
Rear track	C2	1650			
Minimum Road Clearance	-	210			
Turning diameter (m) ⁽⁴⁾	-	11,1	12,6	14,1	16,3
WEIGHT (kg)					
Unladen weight ⁽⁵⁾		2720	2720	2740	2780
Unladen weight front axle		1750/970	1750/970	1770/970	1835/945
Gross Vehicle Weight (GVW)		7500			
Front/rear total weight		3100 / 5800			
Max trailer weight unbraked/Max trailer weight braked		750 / 3500			

1. The length of the body refers to a uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications).
2. Excluding turn signal and side mirrors
3. Possible widths with optional mirror brackets 2115/2170 – 2170/2345 – 2345/2500
4. Curb to curb turning diameter
5. The Unladen weight include spare wheel, full fuel tank and driver, optional excluded. NEES +35 Kg (25/10)
6. Wheelbase modified (see thw optional equipment)
7. NEES II 650.

P 75 - Wheelbase (mm) F 2900 - H 3365 - K 3815 - M 4475

MARCH 2021

€ 42.324 (**)

Equipment	NEES 2	€ 1290 (**)
	Right-hand drive (Wheelbase F - H NEES)	€ 1182 (**)

(**)VAT excluded

Standard features		
<ul style="list-style-type: none"> • EGR - DPD - SCR • MID display • Engine exhaust brake • Side mirrors heated and electric 	<ul style="list-style-type: none"> • Immobilizer • Central locking with remote control • Power operated windows • Suspended seat • Fog lamps Fr and Rr 	<ul style="list-style-type: none"> • Radio DAB+ with USB • Head lamps control levelling • Day-time running lights • Steering adjustable (tilting and height) • Speed limiter (90km/h)
Optional	• Air conditioning	€ 1089 (**)
	• Wheelbase modified	Ask to your dealer
	• Body builder Controller	€ 354 (**)

Engine	ISUZU 4JJ1E6N Diesel Engine 4 cylinders. Intercooler, common-rail with direct injection Variable-geometry turbocharger DISPLACEMENT 2999 cm ³ POWER 110kW (150 hp) 2800 rpm TORQUE 375 Nm 1600 – 2800 rpm EMISSIONS REGULATIONS EURO VI OBD-D.
--------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Safety systems	ABS ESC (Electronic Stability Control) with ASR LDWS AEBS SRS 2 Airbag (Driver/Pass.)
----------------	----------------------------------------------------------------------------------------------------------

Tank	90 L	16 L Ad-Blue®
------	------	---------------

Gearbox and Final drive ratio	6 gear MYY6S – 5.979 - 3.434 - 1.832 - 1.297 - 1.000 - 0.759; Reverse 5.068; Final gear ratio 5.571 (39/7)
-------------------------------	------------------------------------------------------------------------------------------------------------------

Transmission control	Manual	NEES 2
----------------------	--------	--------

Dimensions of the chassis	Width 70 mm, Height 216 mm, Thickness 6 mm
---------------------------	--------------------------------------------

Number of seats	3
-----------------	---

Axle	2 the rear one with twin wheels.
------	-------------------------------------

Tires	Front 215/75 R17,5C simple. Rear 215/75 R17,5C dual.
-------	---------------------------------------------------------


Brakes	Front and rear: ventilated discs with asbestos-free linings. Hydraulic system, with vacuum brake booster EEC standards with ABS, independent circuits on both axles. Drum parking brake on the transmission shaft.
--------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Suspensions	Front and rear: Multi semi elliptical alloy steel leaf spring. Hydraulic double acting shock absorbers.
-------------	---------------------------------------------------------------------------------------------------------

Electric system	Nominal voltage 24V - Generator 90A - 2 x Battery 70Ah
-----------------	--------------------------------------------------------

N.B.: Technical and specification data are given as guide only and they can be modified at any time with no prior warning. Nor the constructor neither MIDI Europe can be considered responsible if any of this information is incorrect.

190 hp Série Bleu OBD-D (7,5 ton)

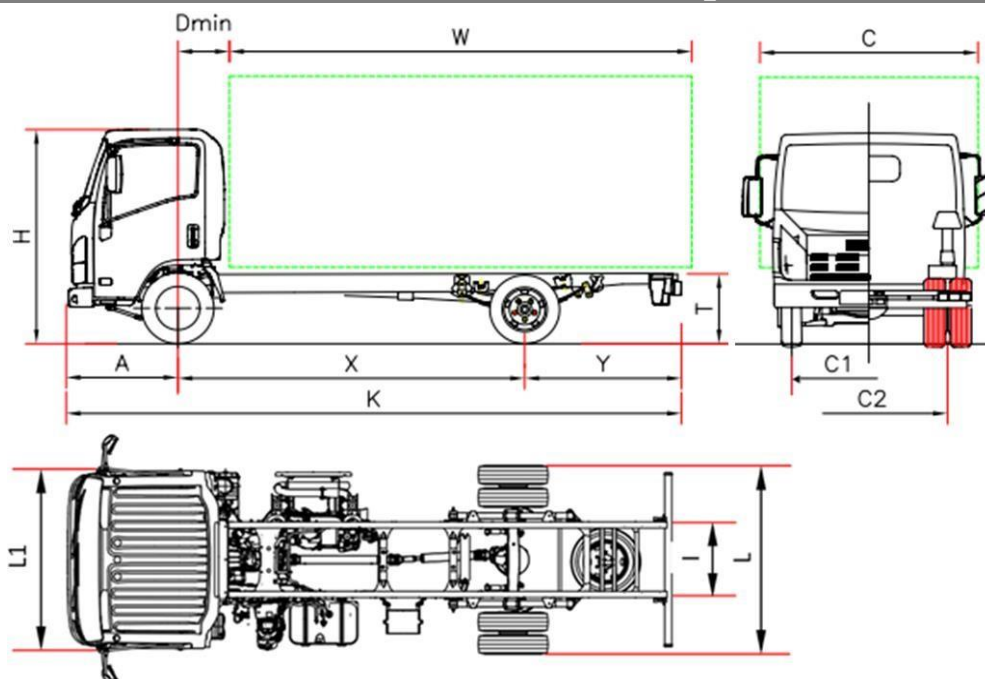

€ 44.424 VAT excluded

P 75		P 75 F	P 75 H	P 75 K	P 75 M	P 75 Q
Wheelbase	X	2900 ⁽⁵⁾	3365	3815	4475	5300 ⁽⁵⁾
Overall length	K	5570	6040	6690	7870	9282
Body lenght min. ⁽¹⁾	W	3810	4280	4930	6110	7522
Body lenght Max. ⁽¹⁾	W	3990	4615	5245	6425	7890
Rear overhang	Y	1560	1565	1765	2285	2872
Chassis height	T	800				
Overall height	H	2265				
Rear axle width	L	2115				
Cab width ⁽²⁾	L1	2040				
Body width ⁽³⁾	C	2345				
Front axle to back of cab	D min	650				
Front overhang	A	1110				
Frame internal size	I	850				
Front track	C1	1680				
Rear track	C2	1650				
Minimum Road Clearance	-	210				
Turning diameter (m) ⁽⁴⁾	-	11,1	12,6	14,1	16,3	19,0
WEIGHT (kg)						
Unladen weight ⁽⁶⁾		2960	2960	2990	3010	3110
Unladen weight front axle		1950/1010	1950/1010	1980/1010	2030/980	2080/1030
Gross Vehicle Weight (GVW)		7500				
Front/rear total weight		3100 / 5800				
Max trailer weight unbraked/Max trailer weight braked		750 / 3500				

- The length of the body refers to a uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications).
- Excluding turn signal and side mirrors
- Possible widths with optional mirror brackets 2115/2170 – 2170/2345 – 2345/2500
- Curb to curb turning diameter
- Wheelbase modified (see thw optional equipment)
- The Unladen weight include spare wheel, full fuel tank and driver, optional excluded. NEES + 35 Kg 25/10).

P 75 - Wheelbase (mm) F 2900 - H 3365 - K 3815 - M 4475 - Q 5300

MARCH 2021

€ 44.424 (**)

Equipment	NEES 2 + Cruise control	€ 1290 (**)
	Right-hand drive (Wheelbase F - H)	€ 1182 (**)

(**)VAT excluded

Standard features

- | | | |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> • EGR - DPD - SCR • MID display • Engine exhaust brake • Side mirrors heated and electric • Immobilizer • Central locking with remote control | <ul style="list-style-type: none"> • Suspended seat • Fog lamps Fr and Rr • Radio DAB+ with USB • Reverse warning buzzer • Power operated windows | <ul style="list-style-type: none"> • Steering adjustable (tilting and height) • Head lamps control levelling • Day-time running lights • Speed limiter (90km/h) |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Optional	• Air conditioning	€ 1089 (**)
	• Wheelbase modified	Ask to your dealer
	• Body builder Controller	€ 354 (**)

Engine

ISUZU 4HK1E6C Diesel Engine 4 cylinders.

Intercooler, common-rail with direct injection

Variable-geometry turbocharger

DISPLACEMENT 5193 cm³

POWER 140kW (190 hp) 2600 rpm

TORQUE 510 Nm 1600 – 2800 rpm

EMISSIONS REGULATIONS EURO VI OBD-D.

Safety systems

ABS
ESC (Electronic Stability Control) with ASR
LDWS
AEBS
 SRS 2 Airbag (Driver/Pass.)

Tank

90 L

16 L Ad-Blue®

Gearbox and Final drive ratio

6 gear MZZ6F 6.369 - 3.767 - 1.966 - 1.355 - 1.000 - 0.782;
 Reverse 6.369;
 Final gear ratio 4.100 (41/10)

Transmission control

Manual

NEES 2

Dimensions of the chassis

Width 70 mm, Height 216 mm, Thickness 6 mm

Number of seats

3

Axle

2
 the rear one with twin wheels.

Tires

Front 215/75 R17,5C simple.
 Rear 215/75 R17,5C dual.

Brakes


Front and rear: ventilated discs with asbestos-free linings. Hydraulic system, with vacuum brake booster EEC standards with ABS, independent circuits on both axles. Drum parking brake on the transmission shaft.

Suspensions

Front and rear: Multi semi elliptical alloy steel leaf spring. Hydraulic double acting shock absorbers.

Electric system

Nominal voltage 24V - Generator 90A - 2 x Battery 70Ah

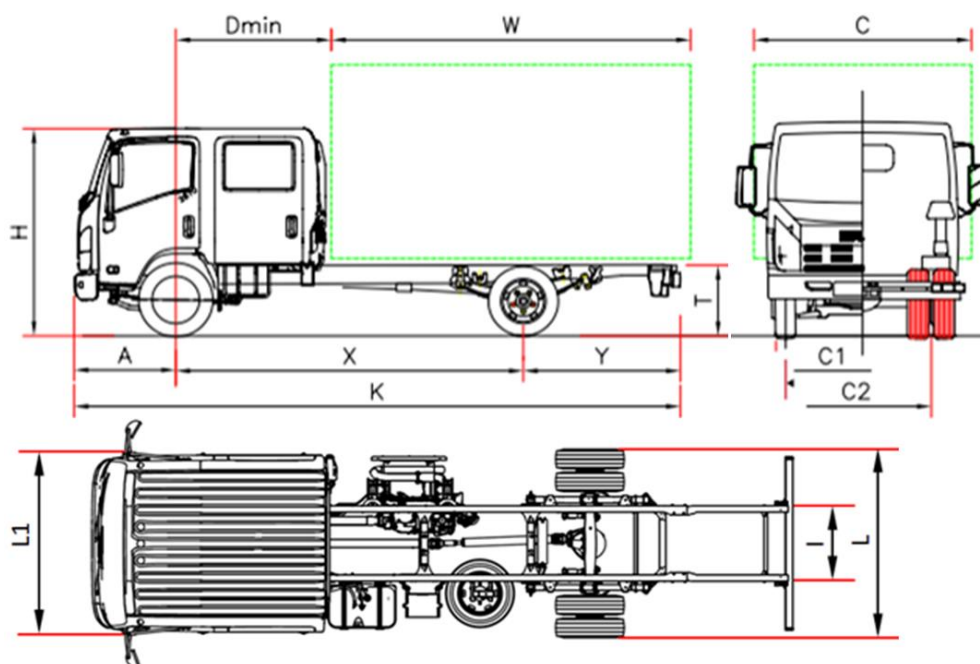

€ 45.660 VAT excluded

P 75		P 75 H	P 75 M	P 75 Q
Wheelbase	X	3365 ⁽⁵⁾	4475	5300 ⁽⁵⁾
Overall length	K	6040	7870	9282
Body lenght min. ⁽¹⁾	W	3230	5060	6472
Body lenght Max. ⁽¹⁾	W	3684	5375	6840
Rear overhang	Y	1565	2285	2872
Chassis height	T		800	
Overall height	H		2280	
Rear axle width	L		2115	
Cab width ⁽²⁾	L1		2040	
Body width ⁽³⁾	C		2345	
Front axle to back of cab	D min		1700	
Front overhang	A		1110	
Frame internal size	I		850	
Front track	C1		1680	
Rear track	C2		1650	
Minimum Road Clearance	-		210	
Turning diameter (m) ⁽⁴⁾	-	12,6	16,3	19,0
WEIGHT (kg)				
Unladen weight ⁽⁶⁾		3235	3265	3365
Unladen weight front axle		2185/1050	2200/1065	2250/1115
Gross Vehicle Weight (GVW)			7500	
Front/rear total weight			3100 / 5800	
Max trailer weight unbraked/Max trailer weight braked			750 / 3500	

1. The length of the body refers to a uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications).

2. Excluding turn signal and side mirrors

3. Possible widths with optional mirror brackets 2115/2170 – 2170/2345 – 2345/2500

4. Curb to curb turning diameter

5. Wheelbase modified (see thw optional equipment)

6. The Unladen weight include spare wheel, full fuel tank and driver, optional excluded. NEES +35 Kg (25/10)


P 75 CREW - Wheelbase (mm) H 3365 - M 4475 - Q 5300

MARCH 2021

€ 45.660 (**)

Equipment	NEES 2 + Cruise control	€ 1290 (**)
(**)VAT excluded		
Standard features		
<ul style="list-style-type: none">• EGR - DPD - SCR• MID display• Engine exhaust brake• Side mirrors heated and electric	<ul style="list-style-type: none">• Immobilizer• Central locking with remote control• Power operated windows• Speed limiter (90km/h)• Fog lamps Fr and Rr	<ul style="list-style-type: none">• Head lamps control levelling• Day-time running lights• Radio DAB+ with USB• Steering adjustable (tilting and height)
Optional	<ul style="list-style-type: none">• Air conditioning• Wheelbase modified• Body builder Controller	€ 1089 (**)
		Ask to your dealer
		€ 354 (**)
Engine	ISUZU 4HK1E6C Diesel Engine 4 cylinders. Intercooler, common-rail with direct injection Variable-geometry turbocharger DISPLACEMENT 5193 cm ³ POWER 140kW (190 hp) 2600 rpm TORQUE 510 Nm 1600 – 2800 rpm EMISSIONS REGULATIONS EURO VI OBD-D.	
Safety systems	ABS ESC (Electronic Stability Control) with ASR LDWS AEBS SRS 2 Airbag (Driver/Pass.)	
Tank	90 L	16 L Ad-Blue®
Gearbox and Final drive ratio	6 gear MZZ6F 6.369 - 3.767 - 1.966 - 1.355 - 1.000 - 0.782; Reverse 6.369; Final gear ratio 4.100 (41/10)	
Transmission control	Manual	NEES 2
Dimensions of the chassis	Width 70 mm, Height 216 mm, Thickness 6 mm	
Number of seats	7	
Axle	2 the rear one with twin wheels.	
Tires	Front 215/75 R17,5C simple. Rear 215/75 R17,5C dual.	
Brakes	Front and rear: ventilated discs with asbestos-free linings. Hydraulic system, with vacuum brake booster EEC standards with ABS, independent circuits on both axles. Drum parking brake on the transmission shaft.	
Suspensions	Front and rear: Multi semi elliptical alloy steel leaf spring. Hydraulic double acting shock absorbers.	
Electric system	Nominal voltage 24V - Generator 90A - 2 x Battery 70Ah	

N.B.: Technical and specification data are given as guide only and they can be modified at any time with no prior warning. Nor the constructor neither MIDI Europe can be considered responsible if any of this information is incorrect.

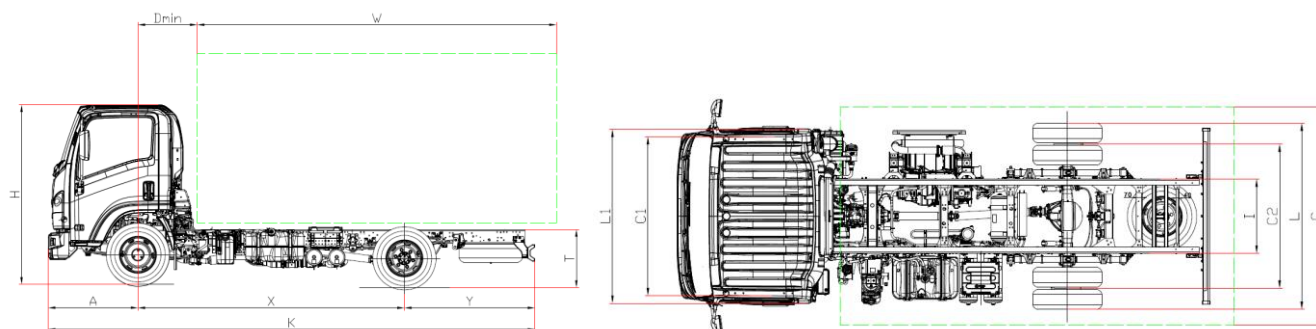

€ 52.290,00 VAT excluded

Q 95		Q 95 H	Q 95 K	Q 95 M
Wheelbase	X	3365	3815	4475
Overall length	K	6123	6773	7953
Body lenght min. ⁽¹⁾	W	4285	4935	6115
Body lenght Max. ⁽¹⁾	W	4635	5285	6465
Rear overhang	Y	1630	1830	2350
Chassis height	T	830		
Overall height	H	2275		
Rear axle width	L	2129		
Cab width ⁽²⁾	L1	2040		
Body width ⁽³⁾	C	2345		
Front axle to back of cab	D min	710		
Front overhang	A	1128		
Frame internal size	I	850		
Front track	C1	1746		
Rear track	C2	1650		
Minimum Road Clearance	-	195		
Turning diameter (m) ⁽⁴⁾	-	13,8	15,3	17,5
WEIGHT (kg)				
Unladen weight ⁽⁵⁾		3335	3375	3415
Unladen weight front axle		2165/1170	2205/1170	2225/1190
Gross Vehicle Weight (GVW)		9500		
Front/rear total weight		3400 / 6800		
Max trailer weight unbraked/Max trailer weight braked		750 / 3500		


1. The length of the body refers to a uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications).
2. Excluding turn signal and side mirrors
3. Possible widths with optional mirror brackets 2129/2170 – 2170/2345 – 2345/2500
4. Curb to curb turning diameter
5. The Unladen weight include spare wheel, full fuel tank and driver, optional excluded. NEES + 35 Kg (25/10).

Q 95 - Wheelbase (mm) H 3365 - K 3815 - M 4475

MARCH 2021

Equipment	NEES 2 + Cruise control	€ 1290 (**)
(**)VAT excluded		
Standard features		
<ul style="list-style-type: none"> • EGR - DPD - SCR • MID display • Engine exhaust brake • Side mirrors heated and electric • Air conditioning 	<ul style="list-style-type: none"> • Immobilizer • Central locking with remote control • Suspended seat • Fog lamps Fr and Rr • Radio DAB+ with USB • Reverse warning buzzer 	<ul style="list-style-type: none"> • Power operated windows • Steering adjustable (tilting and height) • Head lamps control levelling • Day-time running lights • Speed limiter (90km/h)
Optional		
Engine	ISUZU 4HK1E6C Diesel Engine 4 cylinders. Intercooler, common-rail with direct injection Variable-geometry turbocharger DISPLACEMENT 5193 cm ³ POWER 140kW (190 hp) 2600 rpm TORQUE 510 Nm 1600 – 2800 rpm EMISSIONS REGULATIONS EURO VI OBD-D.	
Safety systems	ABS ESC (Electronic Stability Control) with ASR LDWS AEBS SRS 2 Airbag (Driver/Pass.)	
Tank	90 L	16 L Ad-Blue®
Gearbox and Final drive ratio	6 gear MZZ6F 6.369 - 3.767 - 1.966 - 1.355 - 1.000 - 0.782; Reverse 6.369; Final gear ratio 4.777 (43/9)	
Transmission control	Manual	NEES 2
Dimensions of the chassis	Width 70 mm, Height 216 mm, Thickness 6 mm	
Number of seats	3	
Axle	2 the rear one with twin wheels.	
Tires	Front 225/75 R17,5C simple. Rear 225/75 R17,5C dual.	
Brakes	Front and rear: ventilated discs with asbestos-free linings. Follow CEE regulation with ABS 4 channels. Brake type: Full Air dual circuit and engine exhaust brake. Pneumatic parking brake on rear axle.	
Suspensions	Front and rear: Multi semi elliptical alloy steel leaf spring. Hydraulic double acting shock absorbers. Front and Rear Stabilizer bar.	
Electric system	Nominal voltage 24V - Generator 80A - 2 x Battery 90Ah	

Suspensions mechanic Série Bleu OBD-D (11 ton)

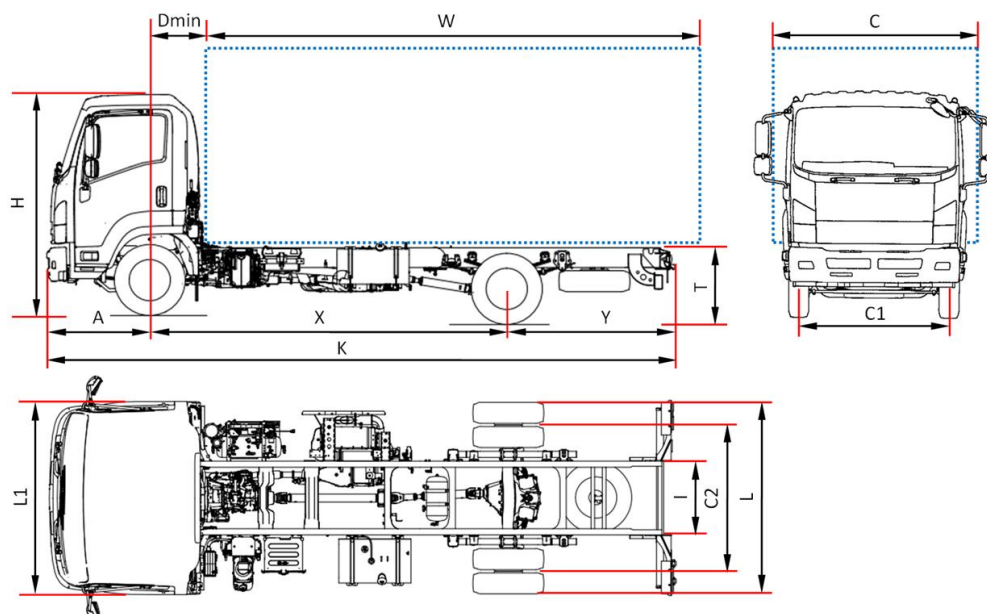

€ 56.116 VAT excluded

F 11		F 11 H
Wheelbase	X	3410
Overall length	K	6010
Body lenght min. ⁽¹⁾	W	4130
Body lenght Max. ⁽¹⁾	W	4480
Rear overhang	Y	1430
Chassis height	T	875
Overall height	H	2565
Rear axle width	L	2170 (2220 mm rear light width)
Cab width ⁽²⁾	L1	2195
Body width ⁽³⁾	C	2550
Front axle to back of cab	D min	710
Front overhang	A	1170
Frame internal size	I	840
Front track	C1	1795
Rear track	C2	1660
Minimum Road Clearance	-	185
Turning diameter (m) ⁽⁴⁾		11,1
WEIGHT (kg)		
Unladen weight ⁽⁵⁾		3640
Unladen weight front axle		2375/1265
Gross Vehicle Weight (GVW)		11000
Front/rear total weight		4000 / 7600
Max trailer weight unbraked/Max trailer weight braked		750 / 3500

1. The length of the body refers to a uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications).
2. Excluding turn signal and side mirrors
3. Possible widths with optional mirror brackets 2220/2286 – 2286/2406 – 2406/2500 – 2500/2550
4. Curb to curb turning diameter
5. The Unladen weight include spare wheel, full fuel tank and driver, optional excluded. NEES +30 kg

F 11 - Wheelbase (mm) H 3410


MARCH 2021

€ 56.116 (**)

Equipment	NEES 2 + HSA	€1800 (**)
(**)VAT excluded		
Standard features		
<ul style="list-style-type: none">• EGR - DPD - SCR• MID display• Speed limiter (90km/h)• Rear lock differential• Engine exhaust brake• Steering adjustable (tilting and height)	<ul style="list-style-type: none">• Air conditioning• Air spring seat• Power operated windows• Side mirrors heated and electric• Reverse warning buzzer• Radio DAB+ with USB	<ul style="list-style-type: none">• Head lamps control levelling• Immobilizer• Central locking with remote control• Cruise control• Day-time running lights• Fog lamps Fr and Rr
Optional	. Body builder Controller	€ 354 (**)
Engine	ISUZU 4HK1E6H Diesel Engine 4 cylinders. common rail direct-injection intercooler with Twin-Turbocharger, additional injector on exhaust pipe. DISPLACEMENT 5193 cm³ POWER 177kW (240 hp) 2400 rpm TORQUE 765 Nm 1600 rpm EMISSIONS REGULATIONS EURO VI OBD-D.	
Safety systems	ABS ESC (Electronic Stability Control) with ASR LDWS AEBS SRS Driver Airbag	
Tank	140 L	16 L Ad-Blue®
Gearbox and Final drive ratio	6 gear MZW6P – 6.615 - 4.095 - 2.358 - 1.531 - 1.000 - 0.722; Reverse 6.615; Final gear ratio 4.333 (39/9)	
Transmission control	Manual	NEES 2 + Kick down
Dimensions of the chassis	Width 60 mm, Height 225 mm (only W/B H height minimum 124,6 mm) Thickness 6 mm	
Number of seats	3	
Axle	2 the rear one with twin wheels.	
Tires	Front 235/75 R17,5C simple. Rear 235/75 R17,5C dual.	
Brakes	Front and rear: drum brake. Wheel parking brake: rear, air control. Brake type: air over hydraulic dual circuit.	
Suspensions	Front and rear: Multi taper leaf spring. Front and rear stabilizer shaft	
Electric system	2 battery 110 A - System 24V - Generator 90A	

N.B.: Technical and specification data are given as guide only and they can be modified at any time with no prior warning. Nor the constructor neither MIDI Europe can be considered responsible if any of this information is incorrect.

Suspensions air Série Bleu OBD-D (11 ton)

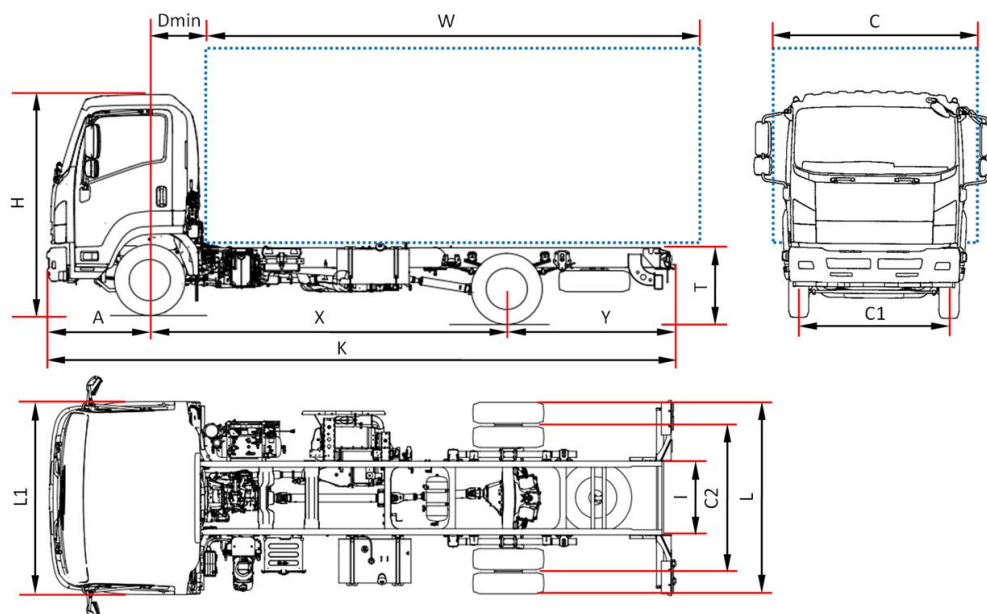

€ 57.684 VAT excluded

F 11		F 11 J	F 11 K	F 11 M	F 11 N
Wheelbase	X	3790	4060	4660	4990
Overall length	K	6580	7000	7900	8350
Body lenght min. ⁽¹⁾	W	4700	5120	6020	6530
Body lenght Max. ⁽¹⁾	W	5050	5470	6370	6880
Rear overhang	Y	1620	1770	2070	2190
Chassis height	T	760			
Overall height	H	2560			
Rear axle width	L	2170 (2220 mm rear light width)			
Cab width ⁽²⁾	L1	2195			
Body width ⁽³⁾	C	2550			
Front axle to back of cab	D min	710			
Front overhang	A	1170			
Frame internal size	I	840			
Front track	C1	1795			
Rear track	C2	1660			
Minimum Road Clearance	-	185			
Turning diameter (m) ⁽⁴⁾		12,2	12,9	14,6	15,6
WEIGHT (kg)					
Unladen weight ⁽⁵⁾		3765	3780	3825	3855
Unladen weight front axle		2355/1410	2350/1430	2375/1450	2395/1460
Gross Vehicle Weight (GVW)		11000			
Front/rear total weight		4000 / 7600			
Max trailer weight unbraked/Max trailer weight braked		750 / 3500			

1. The length of the body refers to a uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications).
2. Excluding turn signal and side mirrors
3. Possible widths with optional mirror brackets 2220/2286 – 2286/2406 – 2406/2500 – 2500/2550
4. Curb to curb turning diameter
5. The Unladen weight include spare wheel, full fuel tank and driver, optional excluded. NEES +30 kg

F 11 - Wheelbase (mm) J 3790 - K 4060 - M 4660 - N 4990


MARCH 2021

€ 57.684 (**)

Equipment	NEES 2 + HSA	€ 1680 (**)
(**) VAT excluded		
Standard features		
<ul style="list-style-type: none"> • EGR - DPD - SCR • MID display • Air conditioning • Speed limiter (90km/h) • Engine exhaust brake • Air spring seat 	<ul style="list-style-type: none"> • Steering adjustable (tilting and height) • Power operated windows • Side mirrors heated and electric • Reverse warning buzzer • Head lamps control levelling 	<ul style="list-style-type: none"> • Immobilizer • Central locking with remote control • Cruise control • Day-time running lights • Fog lamps Fr and Rr • Radio DAB+ with USB
Optional	• Body builder Controller	€ 354 (**)
Engine	ISUZU 4HK1E6H Diesel Engine 4 cylinders. common rail direct-injection intercooler with Twin-Turbocharger, additional injector on exhaust pipe. DISPLACEMENT 5193 cm ³ POWER 177kW (240 hp) 2400 rpm TORQUE 765 Nm 1600 rpm EMISSIONS REGULATIONS EURO VI OBD-D.	
Safety systems	ABS ESC (Electronic Stability Control) with ASR LDWS AEBS SRS Driver Airbag	
Tank	140 L	16 L Ad-Blue®
Gearbox and Final drive ratio	6 gear MZW6P – 6.615 - 4.095 - 2.358 - 1.531 - 1.000 - 0.722; Reverse 6.615; Final gear ratio 4.333 (39/9)	
Transmission control	Manual	NEES 2 + Kick down
Dimensions of the chassis	Width 60 mm, Height 225 mm, Thickness 6 mm	
Number of seats	3	
Axle	2 the rear one with twin wheels.	
Tires	Front 235/75 R17,5C simple. Rear 235/75 R17,5C dual.	
Brakes	Front and rear: drum brake. Wheel parking brake: rear, air control. Brake type: air over hydraulic dual circuit.	
Suspensions	Front: Multi taper leaf spring. Rear: 4-bag Air Suspension with height control. Front and rear stabilizer shaft	
Electric system	2 battery 110 A - System 24V - Generator 90A	

N.B.: Technical and specification data are given as guide only and they can be modified at any time with no prior warning. Nor the constructor neither MIDI Europe can be considered responsible if any of this information is incorrect.

Suspensions mechanic Série Bleu OBD-D (14 ton)

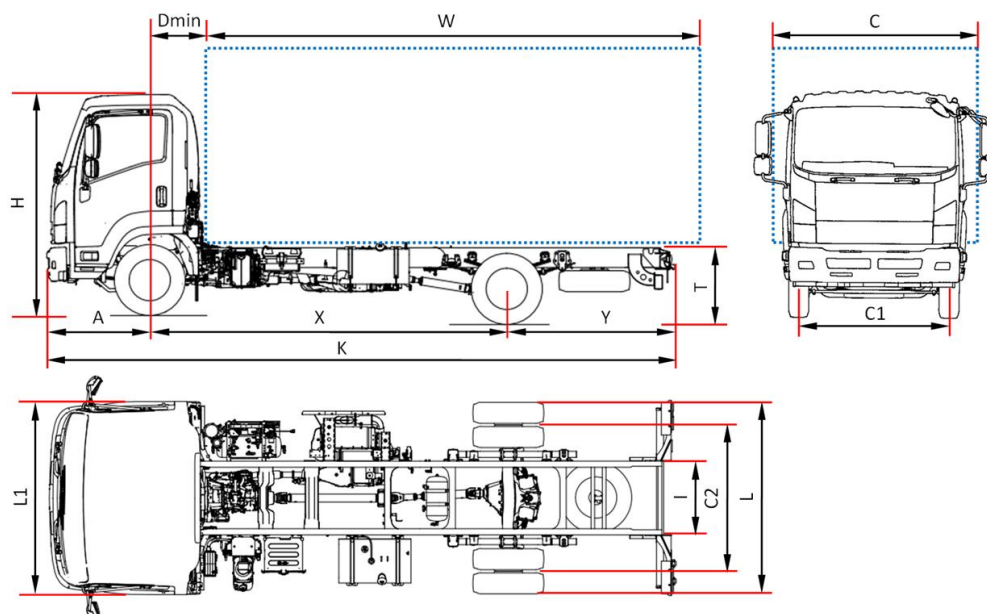

€ 60.873 VAT excluded

F 14		F 14 J
Wheelbase	X	3790
Overall length	K	6610
Body lenght min. ⁽¹⁾	W	4400
Body lenght Max. ⁽¹⁾	W	4500
Rear overhang	Y	1645
Chassis height	T	890
Overall height	H	2600
Rear axle width	L	2255
Cab width ⁽²⁾	L1	2195
Body width ⁽³⁾	C	2550
Front axle to back of cab	D min	710
Front overhang	A	1175
Frame internal size	I	840
Front track	C1	1800
Rear track	C2	1705
Minimum Road Clearance	-	215
Turning diameter (m) ⁽⁴⁾		13,7
WEIGHT (kg)		
Unladen weight ⁽⁵⁾		4100
Unladen weight front axle		2620/1480
Gross Vehicle Weight (GVW)		14000
Front/rear total weight		5000 / 9000
Max trailer weight unbraked/Max trailer weight braked		750 / 3500

1. The length of the body refers to a uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications).
2. Excluding turn signal and side mirrors
3. Possible widths with optional mirror brackets 2255/2286 – 2286/2406 – 2406/2500 – 2500/2550
4. Curb to curb turning diameter
5. The Unladen weight include spare wheel, full fuel tank and driver, optional excluded.


F 14 - Wheelbase (mm) J 3790

MARCH 2021

€ 60.873 (**)

Equipment		
(**)VAT excluded		
Standard features		
<ul style="list-style-type: none"> • EGR - DPD - SCR • MID display • Air conditioning • Speed limiter (90km/h) • Rear lock differential • Engine exhaust brake 	<ul style="list-style-type: none"> • Radio DAB+ with USB • Steering adjustable (tilting and height) • Air spring seat • Power operated windows • Side mirrors heated and electric 	<ul style="list-style-type: none"> • Head lamps control levelling • Central locking with remote control • Cruise control • Day-time running lights • Fog lamps Fr and Rr
Optional	• Body builder Controller	€ 354 (**)
Engine	ISUZU 4HK1E6H Diesel Engine 4 cylinders. common rail direct-injection intercooler with Twin-Turbocharger, additional injector on exhaust pipe. DISPLACEMENT 5193 cm ³ POWER 177kW (240 hp) 2400 rpm TORQUE 765 Nm 1600 rpm EMISSIONS REGULATIONS EURO VI OBD-D.	
Safety systems	ABS ESC (Electronic Stability Control) with ASR LDWS AEBS SRS Driver Airbag	
Tank	140 L	16 L Ad-Blue®
Gearbox and Final drive ratio	6 gear MZW6P – 6.615 - 4.095 - 2.358 - 1.531 - 1.000 - 0.722; Reverse 6.615; Final gear ratio 5.571 (39/7)	
Transmission control	Manual	
Dimensions of the chassis	Width 60 mm, Height 225 mm, Thickness 6 mm	
Number of seats	3	
Axle	2. the rear one with twin wheels.	
Tires	Front 265/70 R19,5C simple Rear 265/70 R19,5C dual	
Brakes	Front and rear drum brakes. To EEC standards with 4-channel ABS, Full Air pneumatic system with two independent circuits and EBS (Brake by wire) electronic control. Engine brake on the exhaust. Pneumatic parking brake on the rear axle.	
Suspensions	Front and rear: Multi taper leaf spring. Front and rear stabilizer shaft	
Electric system	2 battery 110 A - System 24V - Generator 90A	

Suspensions air Série Bleu OBD-D (14 ton)

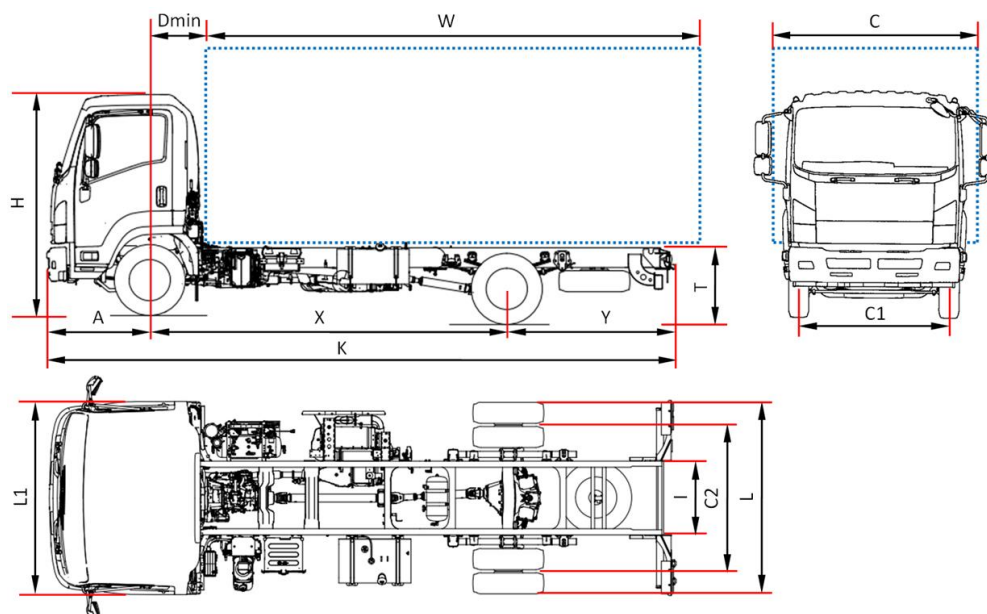

€ 62.418 VAT excluded

F 14		F 14 J	F 14 L	F 14 N	F 14 Q
Wheelbase	X	3790	4360	4990	5320
Overall length	K	6610	7480	8380	8610
Body lenght min. ⁽¹⁾	W	4735	5605	6505	6805
Body lenght Max. ⁽¹⁾	W	5085	5955	6855	7155
Rear overhang	Y	1645	1945	2215	2185
Chassis height	T	785			
Overall height	H	2550			
Rear axle width	L	2225			
Cab width ⁽²⁾	L1	2195			
Body width ⁽³⁾	C	2550			
Front axle to back of cab	D min	710			
Front overhang	A	1175			
Frame internal size	I	840			
Front track	C1	1800			
Rear track	C2	1670			
Turning diameter (m) ⁽⁴⁾		13,7	15,5	17,5	18,6
WEIGHT (kg)					
Unladen weight ⁽⁵⁾		4270	4330	4400	4410
Unladen weight front axle		2685/1585	2735/1595	2775/1625	2790/1990
Gross Vehicle Weight (GVW)		14000			
Front/rear total weight		5000 / 9000			
Max trailer weight unbraked/Max trailer weight braked		750 / 3500			

1. The length of the body refers to a uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications).
2. Excluding turn signal and side mirrors
3. Possible widths with optional mirror brackets 2220/2286 –2286/2406 –2406/2500 – 2500/2550
4. Curb to curb turning diameter
5. The Unladen weight include spare wheel, full fuel tank and driver, optional excluded.NEES +30 kg

F 14 - Wheelbase (mm) J 3790 - L 4360 - N 4990 - Q 5320

MARCH 2021

€ 62.418,00 (**)

Equipment	NEES 2 + HSA	€1680 (**)
(**)VAT excluded		
Standard features		
<ul style="list-style-type: none"> • EGR - DPD - SCR • MID display • Air conditioning • Speed limiter (90km/h) • Engine exhaust brake 	<ul style="list-style-type: none"> • Air spring seat • Power operated windows • Side mirrors heated and electric • Steering adjustable (tilting and height) • Radio DAB+ with USB 	<ul style="list-style-type: none"> • Head lamps control levelling • Immobilizer • Central locking with remote control • Cruise control • Day-time running lights • Fog lamps Fr and Rr
Optional	. Body builder Controller	€ 354 (**)
Engine	ISUZU 4HK1E6H Diesel Engine 4 cylinders. common rail direct-injection intercooler with Twin-Turbocharger, additional injector on exhaust pipe. DISPLACEMENT 5193 cm ³ POWER 177kW (240 hp) 2400 rpm TORQUE 765 Nm 1600 rpm EMISSIONS REGULATIONS EURO VI OBD-D.	
Safety systems	ABS ESC (Electronic Stability Control) with ASR LDWS AEBS SRS Driver Airbag	
Tank	140 L	16 L Ad-Blue®
Gearbox and Final drive ratio	6 gear MZW6P – 6.615 - 4.095 - 2.358 - 1.531 - 1.000 - 0.722; Reverse 6.615; Final gear ratio 5.571 (39/7)	
Transmission control	Manual	NEES 2 + Kick down
Dimensions of the chassis	Width 60 mm, Height 225 mm, Thickness 6 mm	
Number of seats	3	
Tires	Front: 265/70 R19,5C simple. Rear 265/70 R19,5C dual	
Brakes	Front and rear drum brakes. To EEC standards with 4-channel ABS, Full Air pneumatic system with two independent circuits and EBS (Brake by wire) electronic control. Engine brake on the exhaust. Pneumatic parking brake on the rear axle.	
Suspensions	Front: Multi taper leaf spring.Rear: 4-bag Air Suspension with height control.Front and rear stabilizer shaft.	
Electric system	2 battery 110 A - System 24V - Generator 90A	

N.B.: Technical and specification data are given as guide only and they can be modified at any time with no prior warning. Nor the constructor neither MIDI Europe can be considered responsible if any of this information is incorrect.

ISUZU

SERIES N - F

VERSION Euro VI OBD-D

For further information
ISUZU MOTORS LIMITED

www.isuzu.it

www.isuzu.fr

www.isuzu.ch

www.isuzu.es

www.isuzutrucks.cz

www.isuzutrucks.sk

www.isuzutrucks.pl

www.isuzutrucks.com.ro

www.isuzutrucks.hu

www.isuzu.si

EDITION 2020 | Série Bleu

03/2021

Midi Europe advises



The information in this catalogue is intended to be of a general nature only. MIDI Europe reserves the right to modify or change specification at any time. For further information, consult our technical department.
Color of the vehicle shown in this catalogue could differ from the real color of the vehicle.

N.B.: Technical and specification data are given as guide only and they can be modified at any time with no prior warning. Nor the company or MIDI Europe can be considered responsible if any of this information is incorrect.

