


OBD-E

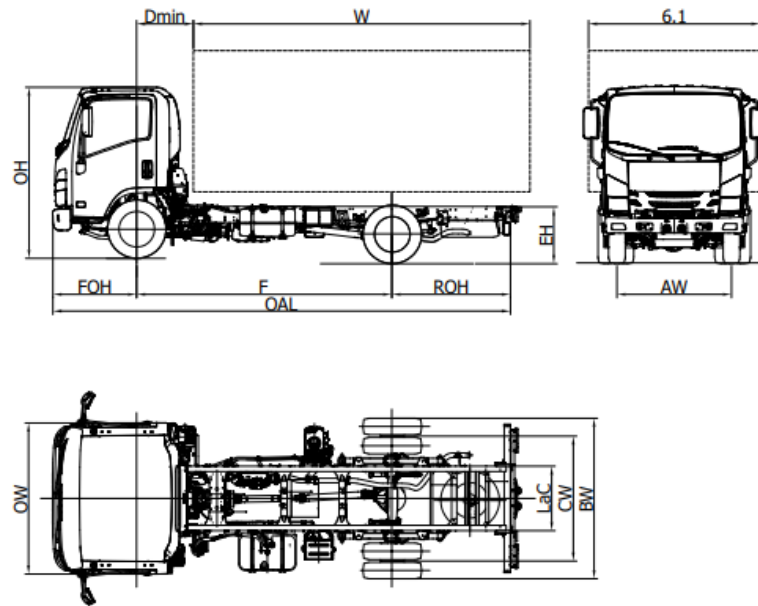

P 75		P 75 F*	P 75 H	P 75 K	P 75 M
Wheelbase	F	2765	3365	3815	4475
Overall length	OAL	5440	6040	6690	7870
Body length min. ⁽¹⁾	W	3660	4260	4910	6090
Body length Max. ⁽¹⁾	W	4000	4600	5250	6430
Rear overhang	ROH	1565	1565	1765	2285
Chassis height	EH		800		
Overall height	OH		2265		
Rear axle width	BW		2115		
Cab width ⁽²⁾	OW		2040		
Body width ⁽³⁾	6,1		2345		
Front axle to back of cab	D min		670 ⁽⁶⁾		
Front overhang	FOH		1110		
Frame internal size	LaC		850		
Front track	AW		1680		
Rear track	CW		1650		
Minimum Road Clearance	HH		210		
Turning diameter (m) ⁽⁴⁾	Dia	10,6	12,6	14,1	16,3
WEIGHT (kg)					
Unladen weight ⁽⁵⁾		2720	2720	2740	2780
Unladen weight front axle		1750/970	1750/970	1770/970	1835/945
Gross Vehicle Weight (GVW)		7500			
Front/rear total weight		3100 / 5800			
Max trailer weight braked/ Max trailer weight unbraked		3500 / 750			

1. The length of the body refers to a uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications).
2. Excluding turn signal and side mirrors
3. Possible widths with optional mirror brackets 2115/2170 - 2170/2345 - 2345/2465
4. Curb to curb turning diameter
5. The Unladen weight include spare wheel, full fuel tank and driver, optional excluded. NEES II + 35 kg.
6. With minimum counterframe height = 100 mm

PROVISIONAL VERSION: All data must be confirmed by the type approval certificate.

*Wheelbase available while stocks last

P 75 - Wheelbase (mm) F 2765 - H 3365 - K 3815 - M 4475

JUNE 2023

Equipment	NEES 2*
	Right-hand drive (Wheelbase F NEES)

Standard features

<ul style="list-style-type: none"> • EGR - DPD - SCR • MID display • Engine exhaust brake • Side mirrors heated and electric • Immobilizer • Seat belt buzzer 	<ul style="list-style-type: none"> • Central locking with remote control • Suspended seat • Fog lamps Fr and Rr • Radio DAB+, USB, Bluetooth • Head lamps control levelling • Power operated windows 	<ul style="list-style-type: none"> • Day-time running lights • Front led lights • Automatic headlight lighting • Steering adjustable (tilting and height) • Speed limiter (90km/h) • Cab overturning safety
---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Optional	• Air conditioning
----------	--------------------

Engine	<p>ISUZU 4JZ1E6N 4 cylinders. 16 v with exhaust variable valve timing and gearing cascade distribution. DENSO i-Art Common rail injection system with VGS turbo (electronic control) and intercooler. DISPLACEMENT 2999 cm³ POWER 110kW (150 hp) 2800 rpm TORQUE 375 Nm 1280 - 2800 rpm EMISSIONS REGULATIONS EURO VI OBD-E.</p>
--------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Safety systems	<p>ABS ESC (Electronic Stability Control) with ASR LDWS AEBS (pedestrian recognition) SRS 2 Airbag (Driver/Pass.)</p>
----------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Tank	<p>90 L</p>	<p>14 L Ad-Blue*</p>
------	--------------------	-----------------------------

Gearbox and Final drive ratio	<p>6 gear MYY6Z - 5.979 - 3.434 - 2.040 - 1.379 - 1.000 - 0.708; Reverse 5.701; Final gear ratio 5.571 (39/7)</p>
-------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------

Transmission control	<p>Manual</p>	<p>NEES 2</p>
----------------------	----------------------	---------------

Dimensions of the chassis	<p>Width 70 mm, Height 216 mm, Thickness 6 mm</p>
---------------------------	---------------------------------------------------

Number of seats	<p>3</p>
-----------------	----------

Axle	<p>2 the rear one with twin wheels.</p>
------	------------------------------------------------------

Tires	<p>Front 215/75 R17,5C simple. Rear 215/75 R17,5C dual.</p>
-------	--------------------------------------------------------------------------

Brakes	<p>Front and rear: ventilated discs with asbestos-free linings. Hydraulic system, with vacuum brake booster EEC standards with ABS, independent circuits on both axles. Drum parking brake on the transmission shaft.</p>
--------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Suspensions	<p>Front parabolic crossbows, rear semielliptical integrated by rubber end-of-stroke pads; hydraulic telescopic shock absorbers with double effect. Front and rear stabilizer bar.</p>
-------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Electric system	<p>Nominal voltage 24V - Generator 90A - 2 x Battery 70Ah</p>
-----------------	---------------------------------------------------------------

*Available on all versions except P75 wheelbase H