


OBD-E

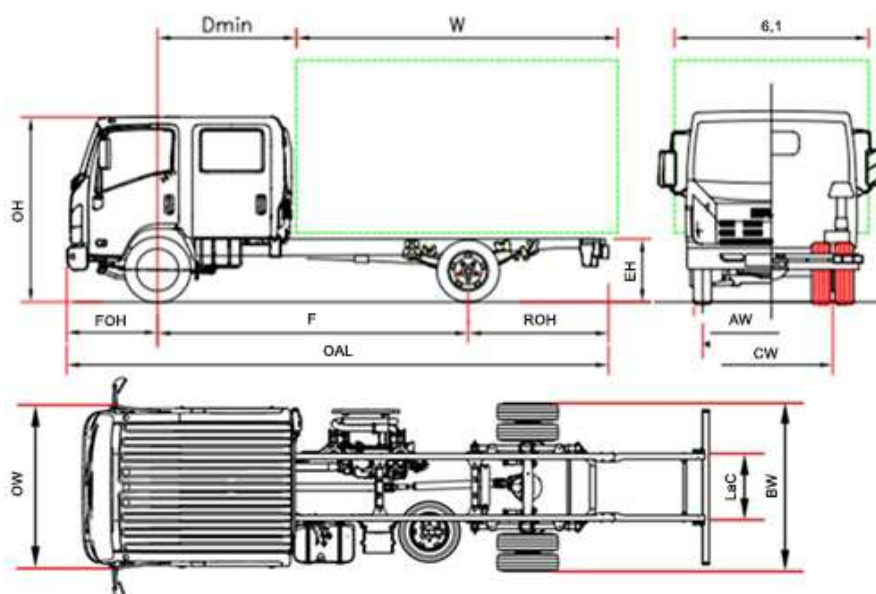

P 75 CREW		P 75 M
Wheelbase	F	4475
Overall length	OAL	7870
Body lenght min. ⁽¹⁾	W	5060
Body lenght Max. ⁽¹⁾	W	5400
Rear overhang	ROH	2280
Chassis height	EH	800
Overall height	OH	2280
Rear axle width	BW	2115
Cab width ⁽²⁾	OW	2040
Body width ⁽³⁾	6,1	2345
Front axle to back of cab	D min	1700
Front overhang	FOH	1110
Frame internal size	LaC	850
Front track	AW	1680
Rear track	CW	1650
Minimum Road Clearance	HH	210
Turning diameter (m) ⁽⁴⁾	Dia	16,3
WEIGHT (kg)		
Unladen weight ⁽⁵⁾		3265
Unladen weight front axle		2200/1065
Gross Vehicle Weight (GVW)		7500
Front/rear total weight		3100 / 5800
Max trailer weight braked/ Max trailer weight unbraked		3500 / 750

1. The length of the body refers to a uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications).
2. Excluding turn signal and side mirrors
3. Possible widths with optional mirror brackets 2115/2170 - 2170/2345 - 2345/2465
4. Curb to curb turning diameter
5. The Unladen weight include spare wheel, full fuel tank and driver, optional excluded. NEES II + 35 kg.

PROVISIONAL VERSION: All data must be confirmed by the type approval certificate.

P 75 CREW - Wheelbase (mm) M 4475

April 2024

Equipment	NEES 2 + Cruise control	
Standard features	<ul style="list-style-type: none"> • EGR - DPD - SCR • MID display • Engine exhaust brake • Side mirrors heated and electric • Immobilizer • Seat belt buzzer • Central locking with remote control • Speed limiter (90km/h) • Power operated windows • Front led lights • Day-time running lights • Fog lamps Fr and Rr • Automatic headlight lighting • Head lamps control levelling • Radio DAB+, USB, Bluetooth • Steering adjustable (tilting and height) 	
Optional	• Air conditioning	
Engine	<p>ISUZU 4HK1E6C 4 cylinders. Intercooler, common-rail with direct injection Variable-geometry turbocharger DISPLACEMENT 5193 cm³ POWER 140kW (190 hp) 2600 rpm TORQUE 510 Nm 1600 - 2800 rpm EMISSIONS REGULATIONS EURO VI OBD-E.</p>	
Safety systems	ABS ESC (Electronic Stability Control) with ASR LDWS AEBS (pedestrian recognition) SRS 2 Airbag (Driver/Pass.)	
Tank	90 L	16 L Ad-Blue®
Gearbox and Final drive ratio	6 gear MZZ6F 6.369 - 3.767 - 1.966 - 1.355 - 1.000 - 0.782; Reverse 6.369; Final gear ratio 4.100 (41/10)	
Transmission control	Manual	NEES 2
Dimensions of the chassis	Width 70 mm, Height 216 mm, Thickness 6 mm	
Number of seats	7	
Axle	2 the rear one with twin wheels.	
Tires	Front 215/75 R17,5C simple. Rear 215/75 R17,5C dual.	
Brakes	Front and rear: ventilated discs with asbestos-free linings. Hydraulic system, with vacuum brake booster EEC standards with ABS, independent circuits on both axles. Drum parking brake on the transmission shaft.	
Suspensions	Front parabolic crossbows, rear semielliptical integrated by rubber end-of-stroke pads; hydraulic telescopic shock absorbers with double effect. Front and rear stabilizer bar.	
Electric system	Nominal voltage 24V - Generator 90A - 2 x Battery 90Ah	

PROVISIONAL VERSION: All data must be confirmed by the type approval certificate.