

ISUZU

M21



CHOOSE. DRIVE. WORK.

M21 TT SINGLE 04

M21 TTH SINGLE 06

M21 T 08

M21 TH 10

M21 TT 12



M21 TTH 14

CHOOSE. DRIVE. WORK.

PROVISIONAL VERSION: All data must be confirmed by the type approval certificate.

The information in this catalogue is intended to be of a general nature only. MIDI Europe reserves the right to modify or change specification at any time. For further information, consult our technical department.
Color of the vehicle shown in this catalogue could differ from the real color of the vehicle.

M21 TT SINGLE		E	H
F	Wheelbase	2500	3360
Chassis-cab dimensions			
OAL	Overall length	4755	6015
W	Body lenght min./max. ⁽⁵⁾	3005 / 3375	4265 / 4500
FOH	Front overhang	1100	
ROH	Rear overhang	1160	1555
Lac	Frame width	700	
EH	Chassis height unladen (nearby rear axle)	715	
HH	Minimum road clearance ⁽⁷⁾	210	
OW	Cab width ⁽¹⁾	1815	
OH	Overall height unladen	2145	2160
BW	Rear axle width	1645	
AW	Front track	1400	
CW	Rear track	1395	
Dia	Turning diameter (m) ⁽²⁾	9,2	11,9
CA	C/L Front axle to Rear of cab ⁽³⁾	650	
6,1	Max. Width with Body ⁽⁴⁾	2120	
Chassis-cab weights			
16,1	Gross Vehicle Weight (GVW)	3500	
16,4	Gross Combined Weight (GCW)	7000	
15	Minimum weight vehicle equipped	2095	2145
15,1	Minimum weight vehicle equipped (front/rear)	1385/710	1465/680
14	Kerb weight in running order ⁽⁶⁾	1865	1925
CT	Chassis-cab Payload	1635	1575
14,1	Kerb weight on axles (front/rear)	1380 / 485	1390 / 535
16,2	Max. permissible weight on axles (front/rear)	1900 / 2000	
18,3	Max. Trailer weight unbraked/braked	750 / 3500	
<div>1. Turning lights and rearview mirrors excluded</div> <div>2. Curb to curb turning diameter</div> <div>3. With minimum counterframe height = 150 mm</div> <div>4. Available also short or long rearview mirror arm.</div> <div>5. The length of the body refers to an uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications)</div> <div>6. Kerb weight includes spare wheel (where present), full fuel tank and 75kg for the driver. Weights are for reference and informational use only. The bodybuilder has the responsibility to verify its compliance with real vehicle weights during the body installation.</div> <div>7. Clearance point: rear differential</div>			

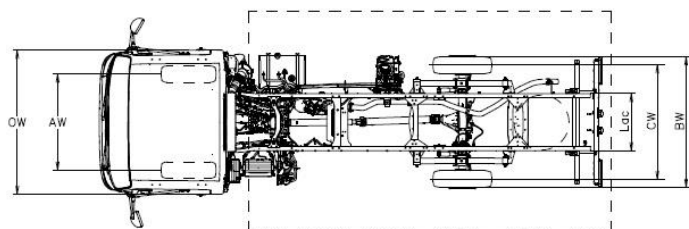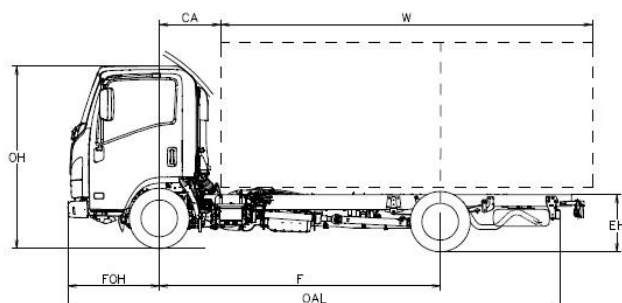

m21TT SINGLE - 3,5 TON

Cabin		
Number of seats: 3	Radio DAB+ with USB	Fog lamps Fr and Rr
MID display	Central locking with remote control	Day-time running lights
Power operated windows	Steering adjustable (tilting and height)	Led lights
Reverse warning buzzer	Head lamps control levelling	Automatic headlight lighting
Cab overturning safety	Driver suspended seat	Header tray (Driver/Pass.)
Bi-color cabin interior	Seat belt buzzer	Sunvisor (Driver/Pass.)

Optional	
Air conditioning	
Radio with GPS	

Brakes		Safety systems	
Hydraulic system, with vacuum brake booster EEC standards with ABS, cross-channel circuits Drum parking brake on the transmission shaft.		ABS with BAS (Brake Assist System) ESC (Electronic Stability Control) with ASR SRS Driver Airbag	
Front	Rear		
Disc	φ 265 x 35 mm	Drum	φ 290 x 75 mm

Diesel Engine		Gearbox and Final drive ratio		
4 cylinders 16 valves, common-rail with direct injection, intercooler and Variable nozzle Turbocharger and EGR. CO2 emission Combined Cycle g/km 293.70, Fuel consumption Combined Cycle l/100 km 11.2		Gear Ratio	Manual MVC6W	km/h 1000 rpm
		1	4.942	5.5
		2	2.686	10.1
		3	1.527	17.7
EMISSIONS REGULATIONS		4	1.000	27.0
Euro 6d		5	0.796	34.0
DISPLACEMENT		6	0.634	42.7
1898 cm3		R	4.597	
POWER		88 kW (120 hp) @ 3.000 - 3.200 rpm		
TORQUE		320 Nm @ 1.600 – 2.000 rpm		
AFTER-TREATMENT		LNT / DPD / SCR	Final drive	4.777 (43/9)

FUEL TANK				ADBLUE TANK	
68 L – Wheelbase E	(nominal value)	83 L – Wheelbase H	(nominal value)	10 L	(nominal value)



Dimensions of the chassis	H = 180 mm; L = 50 mm; Thickness= 4 mm
---------------------------	--

Suspensions	Front	Independent with transverse leaf spring
	Rear	Semi-elliptical steel leaf springs
	Rear differential	φ 220 mm LIGHT DUTY

Tires	205/75 R16C rear single wheels
	Spare wheel

Electric system	Nominal voltage 12V - Generator 90A - Battery 70Ah
-----------------	--

M21 TTh SINGLE		€
F	Wheelbase	2500
Chassis-cab dimensions		
OAL	Overall length	4755
W	Body lenght min./max. ⁽⁵⁾	3005 / 3375
FOH	Front overhang	1100
ROH	Rear overhang	1160
Lac	Frame width	700
EH	Chassis height unladen (nearby rear axle)	715
HH	Minimum road clearance ⁽⁷⁾	210
OW	Cab width ⁽¹⁾	1815
OH	Overall height unladen	2145
BW	Rear axle width	1645
AW	Front track	1400
CW	Rear track	1395
Dia	Turning diameter (m) ⁽²⁾	9,2
CA	C/L Front axle to Rear of cab ⁽³⁾	650
6,1	Max. Width with Body ⁽⁴⁾	2120
Chassis-cab weights		
16,1	Gross Vehicle Weight (GVW)	3500
16,4	Gross Combined Weight (GCW)	7000
15	Minimum weight vehicle equipped	2095
15,1	Minimum weight vehicle equipped (front/rear)	1385/710
14	Kerb weight in running order ⁽⁶⁾	1895
CT	Chassis-cab Payload	1605
14,1	Kerb weight on axles (front/rear)	1380 / 515
16,2	Max. permissible weight on axles (front/rear)	1900 / 2000
18,3	Max. Trailer weight unbraked/braked	750 / 3500
<ol style="list-style-type: none"> Turning lights and rearview mirrors excluded Curb to curb turning diameter With minimum counterframe height = 150 mm Available also short or long rearview mirror arm. The length of the body refers to an uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications) Kerb weight includes spare wheel (where present), full fuel tank and 75kg for the driver. Weights are for reference and informational use only. The bodybuilder has the responsibility to verify its compliance with real vehicle weights during the body installation. Clearance point: rear differential 		

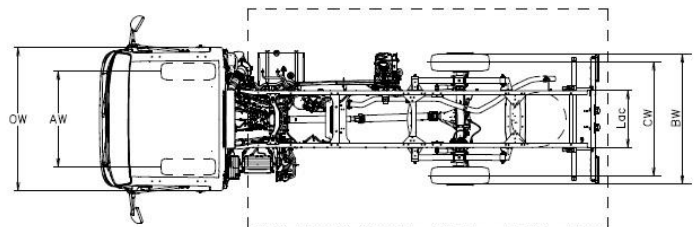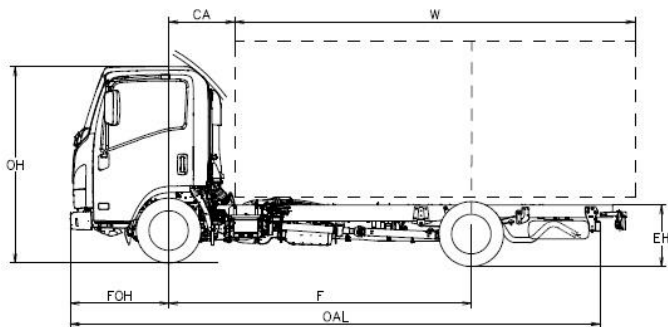

PROVISIONAL VERSION: All data must be confirmed by the type approval certificate.

The information in this catalogue is intended to be of a general nature only. MIDI Europe reserves the right to modify or change specification at any time. For further information, consult our technical department.
Color of the vehicle shown in this catalogue could differ from the real color of the vehicle.

m21T_h SINGLE – 3,5 TON

Cabin

Number of seats: 3	Radio DAB+ with USB	Fog lamps Fr and Rr
MID display	Central locking with remote control	Day-time running lights
Power operated windows	Steering adjustable (tilting and height)	Led lights
Reverse warning buzzer	Head lamps control levelling	Automatic headlight lighting
Cab overturning safety	Driver suspended seat	Header tray (Driver/Pass.)
Bi-color cabin interior	Seat belt buzzer	Sunvisor (Driver/Pass.)

Optional

Air conditioning	
Radio with GPS	

Brakes

Safety systems

Hydraulic system, with vacuum brake booster EEC standards with ABS, cross-channel circuits . Drum parking brake on the transmission shaft.				ABS with BAS (Brake Assist System) ESC (Electronic Stability Control) with ASR SRS Driver Airbag
Front		Rear		
Disc	φ 265 x 35 mm	Drum	φ 290 x 75 mm	

Diesel Engine

Gearbox and Final drive ratio

4 cylinders 16 valves, common-rail with direct injection, intercooler and Variable nozzle Turbocharger and EGR. CO2 emission Combined Cycle g/km 293.70, Fuel consumption Combined Cycle l/100 km 11.2		Gear Ratio	Manual MVC6W	km/h 1000 rpm
		1	4.942	5.5
		2	2.686	10.1
		3	1.527	17.7
EMISSIONS REGULATIONS	Euro 6d	4	1.000	27.0
DISPLACEMENT	1898 cm ³	5	0.796	34.0
POWER	88 kW (120 hp) @ 3.000 - 3.200 rpm	6	0.634	42.7
TORQUE	320 Nm @ 1.600 – 2.000 rpm	R	4.597	
AFTER-TREATMENT	LNT / DPD / SCR	Final drive	4.777 (43/9)	

FUEL TANK

ADBLUE TANK

68 L	(nominal value)	10 L	(nominal value)
------	-----------------	------	-----------------

Dimensions of the chassis

H = 180 mm; L = 50 mm; Thickness = 4 mm

Suspensions

Front	Independent with transverse leaf spring
Rear	Semi-elliptical steel leaf springs
Rear differential	φ 292 mm HEAVY DUTY

Tires

205/75 R16C rear single wheels
Spare wheel

Electric system



Nominal voltage 12V - Generator 90A - Battery 70Ah

PROVISIONAL VERSION: All data must be confirmed by the type approval certificate.

The information in this catalogue is intended to be of a general nature only. MIDI Europe reserves the right to modify or change specification at any time. For further information, consult our technical department.
Color of the vehicle shown in this catalogue could differ from the real color of the vehicle.

M21 T

M21 T		E	F	H
F	Wheelbase	2500	2760	3360
Chassis-cab dimensions				
OAL	Overall length	4780	5295	6015
W	Body lenght min./max. ⁽⁵⁾	3030 / 3415	3545/ 3930	4265 / 4530
FOH	Front overhang	1100		
ROH	Rear overhang	1180	1435	1555
Lac	Frame width	700		
EH	Chassis height unladen (nearby rear axle)	705		
HH	Minimum road clearance ⁽⁷⁾	190		
OW	Cab width ⁽¹⁾	1815		
OH	Overall height unladen	2125	2135	
BW	Rear axle width	1860		
AW	Front track	1400		
CW	Rear track	1425		
Dia	Turning diameter (m) ⁽²⁾	9,2	10	11,9
CA	C/L Front axle to Rear of cab ⁽³⁾	650		
6,1	Max. Width with Body ⁽⁴⁾	2120		
Chassis-cab weights				
16,1	Gross Vehicle Weight (GVW)	3500		
16,4	Gross Combined Weight (GCW)	7000		
15	Minimum weight vehicle equipped	2130	2185	2260
15,1	Minimum weight vehicle equipped (front/rear)	1315/815	1350/835	1385/875
14	Kerb weight in running order ⁽⁶⁾	1875	1890	1930
CT	Chassis-cab Payload	1625	1610	1570
14,1	Kerb weight on axles (front/rear)	1375 / 500	1380 / 510	1395 / 535
16,2	Max. permissible weight on axles (front/rear)	1900 / 2200		
18,3	Max. Trailer weight unbraked/braked	750 / 3500		
<div>1. Turning lights and rearview mirrors excluded</div> <div>2. Curb to curb turning diameter</div> <div>3. With minimum counterframe height = 150 mm</div> <div>4. Available also short or long rearview mirror arm.</div> <div>5. The length of the body refers to an uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications)</div> <div>6. Kerb weight includes spare wheel (where present), full fuel tank and 75kg for the driver. Weights are for reference and informational use only. The bodybuilder has the responsibility to verify its compliance with real vehicle weights during the body installation.</div> <div>7. Clearance point: rear differential</div>				

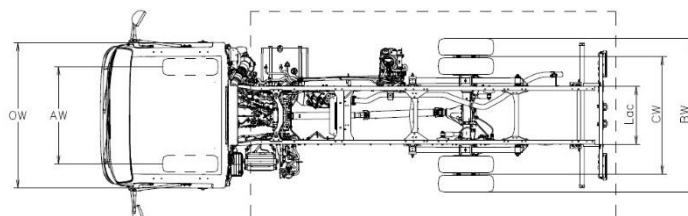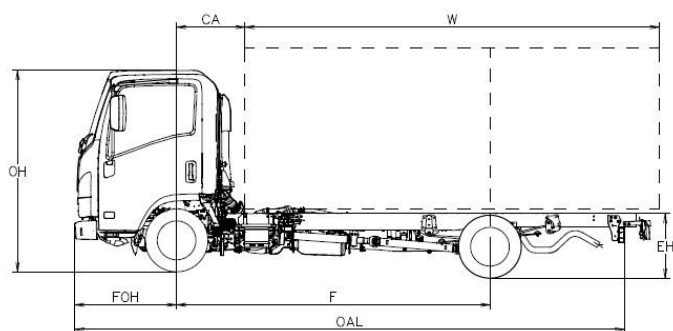

m21T – 3,5 Ton

Cabin		
Number of seats: 3	Central locking with remote control	Fog lamps Fr and Rr
MID display	Steering adjustable (tilting and height)	Day-time running lights
Power operated windows	Head lamps control levelling	Led lights
Reverse warning buzzer	Driver suspended seat	Automatic headlight lighting
Cab overturning safety	Bi-color cabin interior	Sunvisor (Driver)
Seat belt buzzer		

Optional	
Air conditioning	
Radio with GPS	

Brakes		Safety systems	
Hydraulic system, with vacuum brake booster EEC standards with ABS, independent circuits on both axles . Drum parking brake on the transmission shaft.		ABS with BAS (Brake Assist System) ESC (Electronic Stability Control) with ASR SRS Driver Airbag	
Front	Rear		
Disc	φ 265 x 35 mm	Disc	φ 275 x 30 mm

Diesel Engine		Gearbox and Final drive ratio		
4 cylinders 16 valves, common-rail with direct injection, intercooler and Variable nozzle Turbocharger and EGR. CO2 emission Combined Cycle g/km 297.32, Fuel consumption Combined Cycle l/100 km 11.3		Gear Ratio	Manual MVC6W	km/h 1000 rpm
		1	4.942	5.4
		2	2.686	9.9
		3	1.527	17.4
EMISSIONS REGULATIONS	Euro 6d	4	1.000	26.5
DISPLACEMENT	1898 cm ³	5	0.796	33.3
POWER	88 kW (120 hp) @ 3.000 - 3.200 rpm	6	0.634	41.9
TORQUE	320 Nm @ 1.600 – 2.000 rpm	R	4.597	
AFTER-TREATMENT	LNT / DPD / SCR	Final drive	4.556 (41/9)	

FUEL TANK		ADBLUE TANK	
68 L	(nominal value)	10 L	(nominal value)

Dimensions of the chassis	H = 180 mm; L = 50 mm; Thickness = 4 mm
---------------------------	---

Suspensions	Front	Independent with transverse leaf spring
	Rear	Semi-elliptical steel leaf springs
	Rear differential	φ 220 mm LIGHT DUTY

Tires	205/70 R15C rear twin wheels
-------	------------------------------



Electric system	Nominal voltage 12V - Generator 90A - Battery 70Ah
-----------------	--

PROVISIONAL VERSION: All data must be confirmed by the type approval certificate.

		E	F
F	Wheelbase	2500	2760
Chassis-cab dimensions			
OAL	Overall length	4780	5295
W	Body length min./max. ⁽⁵⁾	3030 / 3415	3545 / 3930
FOH	Front overhang	1100	
ROH	Rear overhang	1180	1435
Lac	Frame width	700	
EH	Chassis height unladen (nearby rear axle)	705	
HH	Minimum road clearance ⁽⁷⁾	185	
OW	Cab width ⁽¹⁾	1815	
OH	Overall height unladen	2150	
BW	Rear axle width	1860	
AW	Front track	1400	
CW	Rear track	1425	
Dia	Turning diameter (m) ⁽²⁾	9,2	10
CA	C/L Front axle to Rear of cab ⁽³⁾	650	
6,1	Max. Width with Body ⁽⁴⁾	2120	

Chassis-cab weights			
16,1	Gross Vehicle Weight (GVW)	3500	
16,4	Gross Combined Weight (GCW)	7000	
15	Minimum weight vehicle equipped	2160	2215
15,1	Minimum weight vehicle equipped (front/rear)	1330/830	1365/850
14	Kerb weight in running order ⁽⁶⁾	1995	2005
CT	Chassis-cab Payload	1505	1495
14,1	Kerb weight on axles (front/rear)	1420 / 575	1390 / 615
16,2	Max. permissible weight on axles (front/rear)	2100 / 2435	
18,3	Max. Trailer weight unbraked/braked	750 / 3500	

1. Turning lights and rearview mirrors excluded
2. Curb to curb turning diameter
3. With minimum counterframe height = 150 mm
4. Available also short or long rearview mirror arm.
5. The length of the body refers to an uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications)
6. Kerb weight includes spare wheel (where present), full fuel tank and 75kg for the driver. Weights are for reference and informational use only. The bodybuilder has the responsibility to verify its compliance with real vehicle weights during the body installation.
7. Clearance point: rear differential

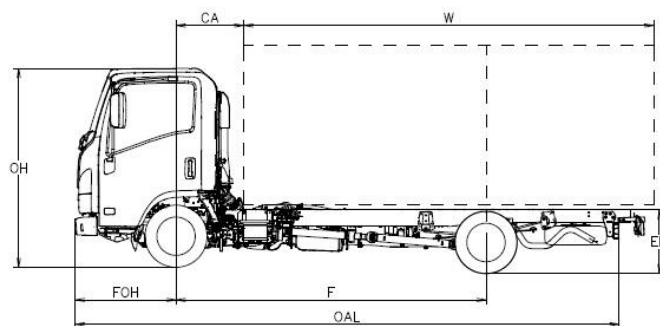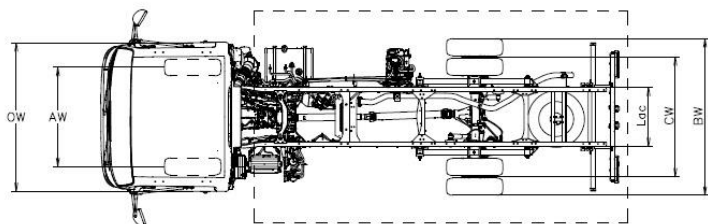

PROVISIONAL VERSION: All data must be confirmed by the type approval certificate.

m21Th – 3,5 TON

Cabin		
Number of seats: 3	Radio DAB+ with USB	Fog lamps Fr and Rr
MID display	Central locking with remote control	Day-time running lights
Power operated windows	Steering adjustable (tilting and height)	Led lights
Reverse warning buzzer	Head lamps control levelling	Automatic headlight lighting
Cab overturning safety	Driver suspended seat	Sunvisor (Driver)
Bi-color cabin interior	Seat belt buzzer	

Optional	
Air conditioning	
Right-hand drive (*)	
Radio with GPS	

(*)according to availability

Brakes		Safety systems	
Hydraulic system, with vacuum brake booster EEC standards with ABS, independent circuits on both axles . Drum parking brake on the transmission shaft.		ABS with BAS (Brake Assist System) ESC (Electronic Stability Control) with ASR SRS Driver Airbag	
Front	Rear		
Disc	Disc		
φ 293 x 40 mm	φ 275 x 30 mm		

Diesel Engine		Gearbox and Final drive ratio		
4 cylinders 16 valves, common-rail with direct injection, intercooler and Variable nozzle Turbocharger and EGR. CO2 emission Combined Cycle g/km 297.32, Fuel consumption Combined Cycle l/100 km 11.3		Gear Ratio	Manual MVC6W	km/h 1000 rpm
		1	4.942	5.5
		2	2.686	10.1
		3	1.527	17.7
EMISSIONS REGULATIONS	Euro 6d	4	1.000	27.0
DISPLACEMENT	1898 cm ³	5	0.796	34.0
POWER	88 kW (120 hp) @ 3.000 - 3.200 rpm	6	0.634	42.7
TORQUE	320 Nm @ 1.600 – 2.000 rpm	R	4.597	
AFTER-TREATMENT	LNT / DPD / SCR	Final drive	4.777 (43/9)	

FUEL TANK		ADBLUE TANK	
68 L	(nominal value)	10 L	(nominal value)

Dimensions of the chassis	H = 180 mm; L = 50 mm; Thickness = 4 mm
---------------------------	---

Suspensions	Front	Independent with transverse leaf spring
	Rear	Semi-elliptical steel leaf springs
	Rear differential	φ 292 mm HEAVY DUTY

Tires	205/75 R16C rear twin wheels
	Spare wheel

Electric system	Nominal voltage 12V - Generator 90A - Battery 70Ah
-----------------	--

PROVISIONAL VERSION: All data must be confirmed by the type approval certificate.

The information in this catalogue is intended to be of a general nature only. MIDI Europe reserves the right to modify or change specification at any time. For further information, consult our technical department.
Color of the vehicle shown in this catalogue could differ from the real color of the vehicle.



M21 TT

M21 TT		E	F	H
F	Wheelbase	2500	2760	3360
Chassis-cab dimensions				
OAL	Overall length	4780	5295	6015
W	Body lenght min./max. ⁽⁵⁾	3030 / 3415	3545 / 3930	4265 / 4530
FOH	Front overhang	1100		
ROH	Rear overhang	1180	1435	1555
Lac	Frame width	700		
EH	Chassis height unladen (nearby rear axle)	715		
HH	Minimum road clearance ⁽⁷⁾	215		
OW	Cab width ⁽¹⁾	1815		
OH	Overall height unladen	2155	2160	
BW	Rear axle width	1860		
AW	Front track	1400		
CW	Rear track	1425		
Dia	Turning diameter (m) ⁽²⁾	9,2	10	11,9
CA	C/L Front axle to Rear of cab ⁽³⁾	650		
6,1	Max. Width with Body ⁽⁴⁾	2120		

Chassis-cab weights

16,1	Gross Vehicle Weight (GVW)	3500		
16,4	Gross Combined Weight (GCW)	7000		
15	Minimum weight vehicle equipped	2160	2215	2290
15,1	Minimum weight vehicle equipped (front/rear)	1330/830	1365/850	1400/890
14	Kerb weight in running order ⁽⁶⁾	1955	1975	2025
CT	Chassis-cab Payload	1545	1525	1475
14,1	Kerb weight on axles (front/rear)	1425 / 530	1395 / 580	1410 / 615
16,2	Max. permissible weight on axles (front/rear)	2100 / 2435		
18,3	Max. Trailer weight unbraked/braked	750 / 3500		

1. Turning lights and rearview mirrors excluded
2. Curb to curb turning diameter
3. With minimum counterframe height = 150 mm
4. Available also short or long rearview mirror arm.
5. The length of the body refers to an uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications)
6. Kerb weight includes spare wheel (where present), full fuel tank and 75kg for the driver. Weights are for reference and informational use only. The bodybuilder has the responsibility to verify its compliance with real vehicle weights during the body installation.
7. Clearance point: rear differential

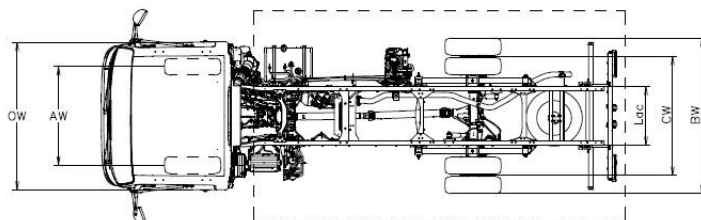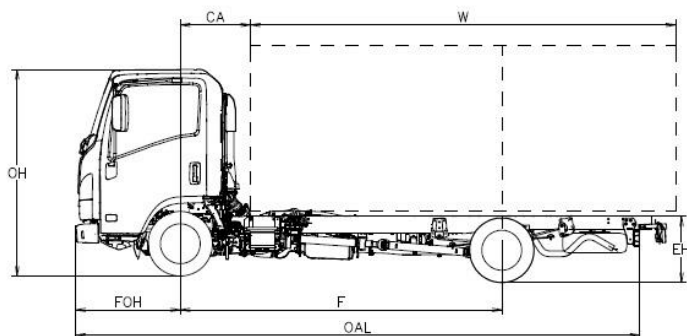

PROVISIONAL VERSION: All data must be confirmed by the type approval certificate.

The information in this catalogue is intended to be of a general nature only. MIDI Europe reserves the right to modify or change specification at any time. For further information, consult our technical department.
Color of the vehicle shown in this catalogue could differ from the real color of the vehicle.

m21TT - 3,5 ton

Cabin		
Number of seats: 3	Radio DAB+ with USB	Fog lamps Fr and Rr
MID display	Central locking with remote control	Day-time running lights
Power operated windows	Steering adjustable (tilting and height)	Led lights
Reverse warning buzzer	Head lamps control levelling	Automatic headlight lighting
Cab overturning safety	Driver suspended seat	Sunvisor (Driver/Pass.)
Bi-color cabin interior	Seat belt buzzer	Header tray (Driver/Pass.)

Optional	
Air conditioning	
Metallic gray color	
Radio with GPS	

Brakes		Safety systems	
Hydraulic system, with vacuum brake booster EEC standards with ABS, independent circuits on both axles . Drum parking brake on the transmission shaft.		ABS with BAS (Brake Assist System) ESC (Electronic Stability Control) with ASR SRS 2 Airbag (Driver/Pass.)	
Front		Rear	
Disc	φ 293 x 40 mm	Disc	φ 275 x 30 mm

Diesel Engine		Gearbox and Final drive ratio		
4 cylinders 16 valves, common-rail with direct injection, intercooler and Variable nozzle Turbocharger and EGR. CO2 emission Combined Cycle g/km 297.32, Fuel consumption Combined Cycle l/100 km 11.3		Gear Ratio	Manual MVC6W	km/h 1000 rpm
		1	4.942	5.5
		2	2.686	10.1
		3	1.527	17.7
		4	1.000	27.0
		5	0.796	34.0
		6	0.634	42.7
		R	4.597	
		Final drive	4.777 (43/9)	
EMISSIONS REGULATIONS	Euro 6d			
DISPLACEMENT	1898 cm ³			
POWER	88 kW (120 hp) @ 3.000 - 3.200 rpm			
TORQUE	320 Nm@ 1.600 – 2.000 rpm			
AFTER-TREATMENT	LNT / DPD / SCR			

FUEL TANK				ADBLUE TANK	
68 L – Wheelbase E / F	(nominal value)	83 L – Wheelbase H	(nominal value)	10 L	(nominal value)

Dimensions of the chassis	H = 180 mm; L = 50 mm; Thickness = 4 mm
---------------------------	---

Suspensions	Front	Independent with transverse leaf spring
	Rear	Semi-elliptical steel leaf springs
	Rear differential	φ 220 mm LIGHT DUTY

Tires	205/75 R16C rear twin wheels
	Spare wheel

Electric system	Nominal voltage 12V - Generator 90A - Battery 70Ah
-----------------	--

PROVISIONAL VERSION: All data must be confirmed by the type approval certificate.

The information in this catalogue is intended to be of a general nature only. MIDI Europe reserves the right to modify or change specification at any time. For further information, consult our technical department.
Color of the vehicle shown in this catalogue could differ from the real color of the vehicle.

F Wheelbase

3360

Chassis-cab dimensions



OAL	Overall length	6015
W	Body length min./max. ⁽⁵⁾	4265 / 4530
FOH	Front overhang	1100
ROH	Rear overhang	1555
Lac	Frame width	700
EH	Chassis height unladen (nearby rear axle)	715
HH	Minimum road clearance ⁽⁷⁾	185
OW	Cab width ⁽¹⁾	1815
OH	Overall height unladen	2160
BW	Rear axle width	1860
AW	Front track	1400
CW	Rear track	1425
Dia	Turning diameter (m) ⁽²⁾	11,9
CA	C/L Front axle to Rear of cab ⁽³⁾	650
6,1	Max. Width with Body ⁽⁴⁾	2120

Chassis-cab weights

16,1	Gross Vehicle Weight (GVW)	3500
16,4	Gross Combined Weight (GCW)	7000
15	Minimum weight vehicle equipped	2290
15,1	Minimum weight vehicle equipped (front/rear)	1400/890
14	Kerb weight in running order ⁽⁶⁾	2055
CT	Chassis-cab Payload	1445
14,1	Kerb weight on axles (front/rear)	1410/645
16,2	Max. permissible weight on axles (front/rear)	2100 / 2435
18,3	Max. Trailer weight unbraked/braked	750 / 3500

1. Turning lights and rearview mirrors excluded
2. Curb to curb turning diameter
3. With minimum counterframe height = 150 mm
4. Available also short or long rearview mirror arm.
5. The length of the body refers to an uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications)
6. Kerb weight includes spare wheel (where present), full fuel tank and 75kg for the driver. Weights are for reference and informational use only. The bodybuilder has the responsibility to verify its compliance with real vehicle weights during the body installation.
7. Clearance point: rear differential

PROVISIONAL VERSION: All data must be confirmed by the type approval certificate.

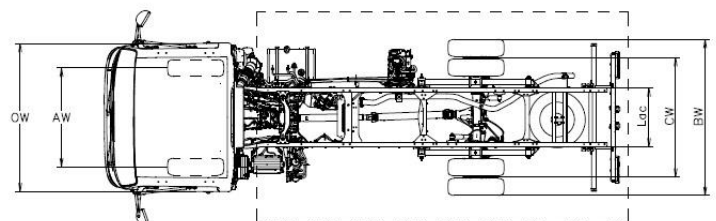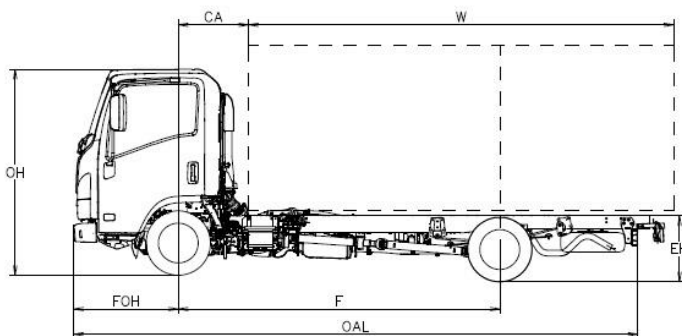

The information in this catalogue is intended to be of a general nature only. MIDI Europe reserves the right to modify or change specification at any time. For further information, consult our technical department.
Color of the vehicle shown in this catalogue could differ from the real color of the vehicle.

m21TT_h - 3,5 TON

Cabin		
Number of seats: 3	Radio DAB+ with USB	Fog lamps Fr and Rr
MID display	Central locking with remote control	Day-time running lights
Power operated windows	Steering adjustable (tilting and height)	Led lights
Reverse warning buzzer	Head lamps control levelling	Automatic headlight lighting
Cab overturning safety	Driver suspended seat	Sunvisor (Driver/Pass.)
Bi-color cabin interior	Seat belt buzzer	Header tray (Driver/Pass.)

Optional	
Air conditioning	
Radio with GPS	

Brakes		Safety systems	
Hydraulic system, with vacuum brake booster EEC standards with ABS, independent circuits on both axles . Drum parking brake on the transmission shaft.		ABS with BAS (Brake Assist System) ESC (Electronic Stability Control) with ASR SRS 2 Airbag (Driver/Pass.)	
Front	Rear		
Disc	Disc		
φ 293 x 40 mm	φ 275 x 30 mm		

Diesel Engine		Gearbox and Final drive ratio		
4 cylinders 16 valves, common-rail with direct injection, intercooler and Variable nozzle Turbocharger and EGR. CO2 emission Combined Cycle g/km 297.32, Fuel consumption Combined Cycle l/100 km 11.3		Gear Ratio	Manual MVC6W	km/h 1000 rpm
		1	4.942	5.5
		2	2.686	10.1
		3	1.527	17.7
EMISSIONS REGULATIONS		4	1.000	27.0
DISPLACEMENT		5	0.796	34.0
POWER		6	0.634	42.7
TORQUE		R	4.597	
AFTER-TREATMENT		Final drive	4.777 (43/9)	

FUEL TANK		ADBLUE TANK	
83 L	(nominal value)	10 L	(nominal value)

Dimensions of the chassis	H = 180 mm; L = 50 mm; Thickness = 4 mm
---------------------------	---

Suspensions	Front	Independent with transverse leaf spring
	Rear	Semi-elliptical steel leaf springs
	Rear differential	φ 292 mm HEAVY DUTY

Tires	205/75 R16C rear twin wheels
	Spare wheel

Electric system	Nominal voltage 12V - Generator 90A - Battery 70Ah
-----------------	--

PROVISIONAL VERSION: All data must be confirmed by the type approval certificate.

M21

www.isuzu.it

www.isuzu.fr

www.isuzu.ch

www.isuzu.es

www.isuzutrucks.cz



www.isuzutrucks.sk

www.isuzutrucks.pl

www.isuzuromania.com.ro

www.isuzutrucks.hu

www.isuzu.si

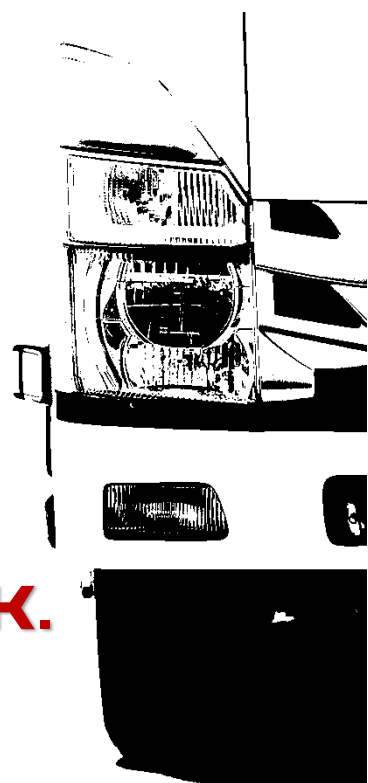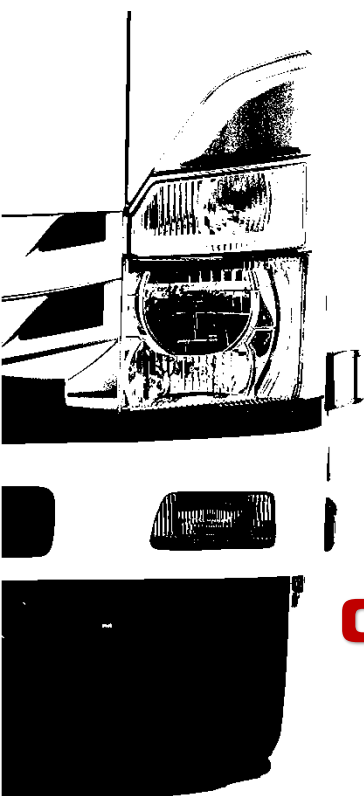

CHOOSE. DRIVE. WORK.
ISUZU